


■ X4 Incandescent Series



▣ DIMENSIONS

Dimensions are approximate and subject to change.

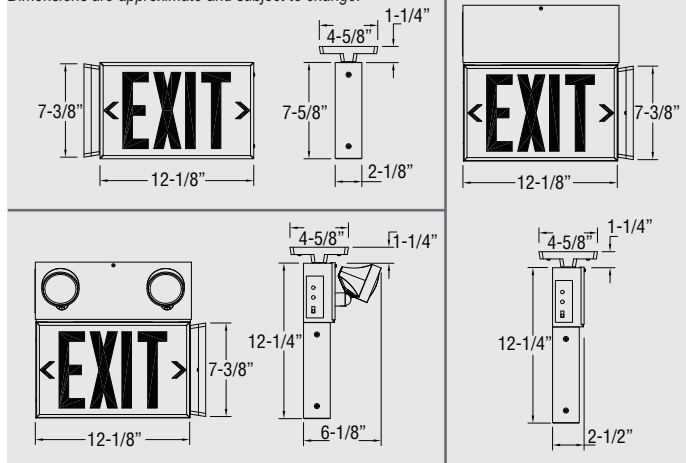

▣ POWER CONSUMPTION CHART (Incandescent Exit)

Model	AC Specs		DC Specs	
	AC-only	DC Specs	DC Specs	DC Specs
Exit Sign (incand.)	120Vac or 277Vac	Less than 24W	-	-
Self-powered	120 to 277Vac	Less than 30W	Lead-Calcium Nickel-Cadmium	Min. 90 Minutes
Mini-Systems	120 to 277Vac	Less than 30W	See Unit Rating Chart	

▣ UNIT SELECTION CHART (Combination Unit)

Battery Type	DC Voltage	Model No.	Watts to 87.5% of rated battery voltage*			
			1 1/2 hrs.	2 hrs.	3 hrs.	4 hrs.
Lead-Calcium	6	X4E	22	22	9	6
Nickel-Cadmium		X4EN	16	16	6	-

*National Electrical Code Specification

Steel Incandescent Exit Signs and Combination Units
AC Only and Self-Powered
Sealed Maintenance-Free Lead Calcium
and Nickel-Cadmium Batteries
UL Listed

AC Only signs are UL listed for use in Damp Locations
The X4 Incandescent Series exit signs and power pack combination units offer a complete package of features to make installation fast and easy.

▣ FEATURES

Reliability

The X4 Series has a three-year full warranty (excluding lamps and fuses).

Unit Data

The X4 Series is constructed of a rugged steel housing with programmable directional chevrons. All exit signs are universal and come standard with canopy kit, extra stencil and diffuser to permit any mounting either as single or double face. Completely self-contained power pack provides a minimum of 90 minutes of emergency lighting.

Circuitry

Automatic, constant-current battery charger with solid-state transfer and AC-LED monitor and test switch.

Choice of Models

Exit Sign

= AC input (AC-only and AC/DC models): 120Vac or 277Vac

= DC input (AC/DC models): 6, 12 or 24Vdc

= Self-powered: 120/277Vac; Lead-Calcium or Nickel-Cadmium battery

Combination Units

Remote capacity Lead Calcium models (E)

No heads = 10 Watts remote capacity

Lamps

12 Watts (two per sign) AC

3.7 Watts (three per sign) DC

Power Requirements

Dual Voltage 120/277Vac, 60Hz, 0.3/0.15 Amp

▣ OPTIONS

(Add Suffix to Model No.)

AC/DC Remote (6-24Vdc)	-DC
Dual Circuit (AC units only)	-2
Flasher/Buzzer (powerpack only)	-FB
Open Face/Special Wording	-Y

▣ ACCESSORIES

(Order as a separate item)

277 Volt Conversion Kit-Black	CTXB-277
277 Volt Conversion Kit-White	CTXW-277
White Pendant	PW-*
Black Pendant	PB-*
Wire Guard (Ceiling or End Mount-Exit)	WG5-L
Wire Guard (Wall Mount-Exit)	WG12-L
Wire Guard (Combination Unit)	WG6-L

*Specify Pendant length (12", 24", 36" etc.)

▣ ORDERING FORMAT

U	X4	E	B	R	B	/2M	-FAF	
Style	Model	Type	Color	Letter Color	Stencil	Voltage*	Combo Unit	Options
U= Universal 2 faces & canopy	X4 Series	Blank= AC Only E= Self-Powered Lead Calcium with Power Pack EN= Self-Powered NICAD, with Power Pack N= Self-Powered (self-contained no additional power pack needed) (Exit Only)	W= White B= Black	R= Red G= Green	W= White B= Black A= Aluminum	Blank= 120 Volt -277= 277 Volt	/0= 0 heads power use for remote fixtures /1L= 1 Large head /1M= 1 Mini head /2L= 2 Large heads /2M= 2 Mini heads	-FAF= Fire Alarm Flasher

*AC Only