



# SERIES X3

TYPE: \_\_\_\_\_  
 CATALOGUE #: \_\_\_\_\_  
 NOTES: \_\_\_\_\_



The X3 Series exit signs and power packs combine versatility, energy efficiency and performance in a moderately-priced package.

## Extruded Aluminum LED Exits and Combination Units

*Sealed Maintenance-Free Lead Calcium or Nickel-Cadmium Battery  
 UL924 listed*

*AC-Only exit signs are UL listed for use in Damp Locations*



### Features

- **Reliability**  
 The X3 Series has a three-year full warranty (less batteries and lamps).
- **Unit Data**  
 The X3 Series housing is constructed of extruded aluminum and features universal chevrons and a bottom aperture that provides a down-light effect. Universal exit signs are supplied with canopy kit, extra stencil and diffuser set to permit any mounting either as single or double face. Long-life, energy-efficient, ALINGAP technology LED light source reduces maintenance and energy costs. LED Combination units have additional 13-19 watts remote capacity with (2) 6-watt mounted heads, depending on the model.
- **Light Source**  
 The unit comes standard with two 6 volt, 6-watt high intensity wedge base incandescent lamps. Other lamp options are available, please refer to Lamp Chart.
- **Choice of Models**  
**Exit Sign**  
 = AC input: universal 2-wire 120 to 277Vac 50/60Hz  
 = AC/DC models: universal 2-wire 6 to 24Vdc  
 = Self-powered models: long-life, sealed  
**Nickel-Cadmium battery**
- **Combination Units**  
**Remote capacity – Lead Calcium Battery (E)**  
**No heads** = 30-Watts remote capacity  
**Two 6-watt ELF2 mounted heads** = 18 Watts remote capacity  
**Remote capacity – Nickel-Cadmium Battery (EN)**  
**No heads** = 24-Watts remote capacity  
**Two 6-watt ELF2 mounted heads** = 12 Watts remote capacity
- **Power Consumption**  
 120/277 Vac, 60Hz, 0.3/0.15 Amp (Combo unit)

### Unit Rating Chart


Total DC power available for local and remote emergency lights.						
Battery Type	DC Voltage	Model Number	*Watts to 87-1/2% of Rated Battery Voltage			
			1-1/2 Hrs.	2 Hrs.	3 Hrs.	4 Hrs.
Lead-Calcium	6	UX3E	30	20	15	10
Nickel-Cadmium	6	UX3EN	24	18	12	9

\*National Electrical Code Specification

### Power Consumption Chart

LED Exit Signs:				
Model	AC Specs		DC Specs	
AC-only	120 to 277Vac	Less than 1.5W	-	-
AC/DC	120 to 277Vac	Less than 1.5W	6 to 24Vdc	Less than 1.5W
Self-powered	120 to 277Vac	Less than 3W	Nickel-Cadmium	Min. 90 Minutes

# Specifications For Series X3

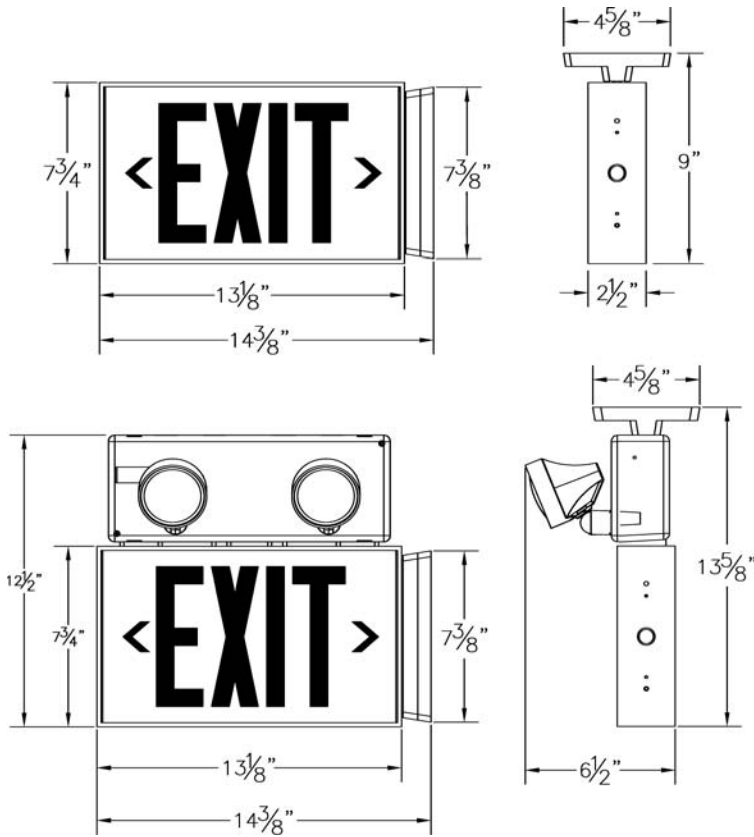

## Optional Features

**Description** **Add Suffix**  
 AC/DC Remote (6-24Vdc) ..... -DC  
 Flasher/Buzzer (Self-powered signs only) ..... -FB

**Accessories** (order as a separate item)  
 277 Volt Conversion Kit-Black ..... CTXB-277  
 277 Volt Conversion Kit-White ..... CTXW-277  
 White Pendant ..... PW-  
 Black Pendant ..... PB-\*

\*Specify Pendant length (12", 24", 36", etc.)

## Ordering Information AC Only, Self-powered Example: UX#ENBRALED/2MFB

Style	Model	Type	Color	Letter Color	Stencil	Light Source	Combo Unit	Options*
U= universal 2 faces & canopy	X3 Series	Blank= AC only	W= white	R= red	W= white	LED= LED	/O= 0 heads power use for remote fixtures	FB= flasher/buzzer
		E= self-powered lead-calcium	B= black	G= green	B= black		/1L= 1 large head	
		EN= self-powered nickel-cadmium			A= aluminum		/1M= 1 mini head	
							/2L= 2 large heads	
							/2M= 2 mini heads	



**Thomas & Betts**