

## X4 Incandescent Series



### Steel Incandescent Exit Signs and Combination Units AC Only and Self-Powered

### Sealed Maintenance-Free Lead Calcium and Nickel-Cadmium Batteries

### UL Listed

### AC Only signs are UL listed for use in Damp Locations

The X4 Incandescent Series exit signs and power pack combination units offer a complete package of features to make installation fast and easy.

#### FEATURES

##### Reliability

The X4 Series has a three-year full warranty (excluding lamps and fuses).

##### Unit Data

The X4 Series is constructed of a rugged steel housing with programmable directional chevrons. All exit signs are universal and come standard with canopy kit, extra stencil and diffuser to permit any mounting either as single or double face. Long-life, energy-efficient red LED ALINGAP technology light source. Completely self-contained power pack provides a minimum of 90 minutes of emergency lighting.

##### Circuitry

Fully integrated circuitry includes a 2-wire 120-277Vac AC voltage input regulator, as well as an automatic, constant-current battery charger with solid-state transfer and AC-LED monitor and test switch.

##### Choice of Models

##### Exit Sign

= AC input (AC-only and AC/DC models): 120Vac or 277Vac

= DC input (AC/DC models): 6, 12 or 24Vdc

= Self-powered: 120/277Vac; Lead-Calcium or Nickel-Cadmium battery

##### Combination Units

##### Remote capacity Lead Calcium models

No heads = 22 Watts remote capacity

Two 6-watt ELF2 heads = 10 Watts remote capacity

##### Remote capacity Nickel-Cadmium models

No heads = 16 Watts remote capacity

Two 5.4-watt ELF2 heads = no remote capacity

##### Power Requirements

Dual Voltage 120/277Vac, 60Hz, 0.3/0.15 Amp (Self-Powered models)

#### OPTIONS

##### (Add Suffix to Model No.)

AC/DC Remote (6-24Vdc).....	-DC	Suffix
Fire Alarm Flasher.....	-FAF	
Dual Circuit (AC units only).....	-2	
Flasher/Buzzer (Self-powered models only).....	-FB	
Open Face/Special Wording.....	-Y	


#### ACCESSORIES

##### (Order as a separate item)

277 Volt Conversion Kit-Black.....	CTXB-277
277 Volt Conversion Kit-White.....	CTXW-277
White Pendant.....	PW-*
Black Pendant.....	PB-*
Wire Guard (Ceiling or End Mount-Exit).....	WG5
Wire Guard (Wall Mount-Exit).....	WG12
Wire Guard (Combination Unit).....	WG6

\*Specify Pendant length (12", 24", 36" etc.)

#### DIMENSIONS

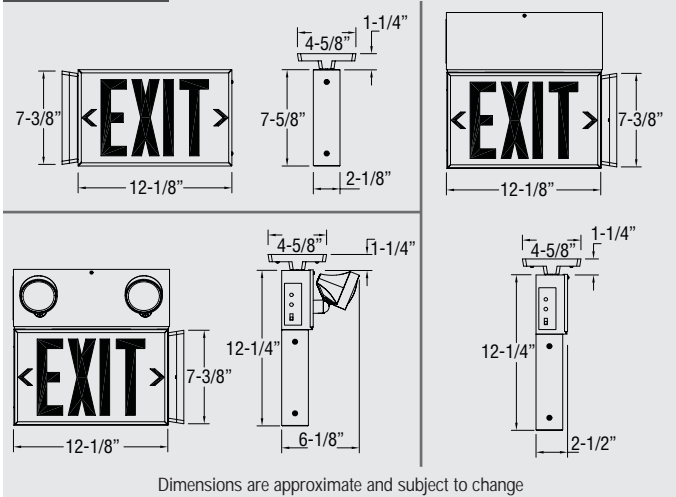

#### POWER CONSUMPTION CHART (Incandescent Exit)

Model		AC Specs		DC Specs	
Exit Sign (incand.)	AC-only	120Vac or 277Vac	Less than 24 W	-	-
	Self-powered	120/277Vac	Less than 30 W	Lead-Calcium	Min. 90 Minutes
Mini-Systems		120/277Vac	Less than 30 W	See Unit Rating Chart	

#### UNIT RATING CHART (Combination Unit)

Battery Type	DC Voltage	Model Number	*Watts to 87-1/2% of Rated Battery Voltage			
			1-1/2 Hrs.	2 Hrs.	3 Hrs.	4 Hrs.
Lead-Calcium	6	X4E	22	22	9	6
Nickel-Cadmium	6	X4EN	16	16	6	-

\*National Electrical Code Specification

#### ORDERING FORMAT

U	X4	E	B	R	B	/2M	-FAF	
Style U=Universal 2 faces & canopy	Model X4 Series	Type Blank=AC Only E=Self-Powered Lead Calcium with Power Pack EN=Self-Powered NICAD, with Power Pack N=Self-Powered (self-contained NiCad) (Exit Only)	Color W=White B=Black	Letter Color R=Red G=Green	Stencil W=White B=Black A=Aluminum	Voltage (AC Only) Blank=120 Volt -277=277 Volt	Combo Unit /0=0 heads power use for remote fixtures /1L=1 Large head /1M=1 Mini head /2L=2 Large heads /2M=2 Mini heads	Options -FAF= Fire Alarm Flasher