

## Genesis™ GX & GXE Series

Die-cast aluminum LED exit sign



### Construction

- Faceplate, backplate and canopy are made of die-cast aluminum
- 6 inch EXIT lettering legend, available in red or green
- 8 inch EXIT lettering legend, available in red
- Choice of finishes: white, black, brushed aluminum or dark bronze

### Mounting

- Surface mount
- Canopy included for end or ceiling mount applications
- Universal J-Box mounting

### Special Wording Panel

Available. Contact your sales representative with your design requirements

### Electronics

- Standard Improved Diagnostics on GXE
- Optional Nexus® monitoring system
- 120-277 60Hz

### Approvals

- CSA-US (To UL 924 standards)
- Damp location optional 50°F to 104°F (10°C to 40°C)
- Meets NFPA101 (Life Safety Code), NFPA 70 NEC, OSHA illumination standards

### Warranty (subject to proper installation and maintenance)

Five-year limited warranty

Detailed warranty terms located on [page 182](#) or online at: [www.lightalarms.com](http://www.lightalarms.com)

nexus



### Power consumption chart

Model (6 inch Exit legend)	AC Specs	DC Specs
AC-only	120 to 347VAC, 50/60Hz (1.25W)	-
AC/DC	120 to 347VAC, 50/60Hz (1.25W)	6 to 48VDC (Less than 1.5W)
Self-powered	120 to 347VAC, 50/60Hz (1.6W)	Ni-Cd battery (Minimum of 90 minutes)
Model (8 inch Exit legend)	AC Specs	DC Specs
AC-only	120 to 347VAC, 50/60Hz (2.5W)	-
AC/DC	120 to 347VAC, 50/60Hz (2.5W)	6 to 48VDC (Less than 1.6W)
Self-powered	120 to 347VAC, 50/60Hz (2.9W)	Ni-Cd battery (Minimum of 90 minutes)


### Frame/Face plate color



Brushed aluminum



Black




White



Dark bronze (painted)

**Dimensions** (Dimensions are approximate and subject to change):

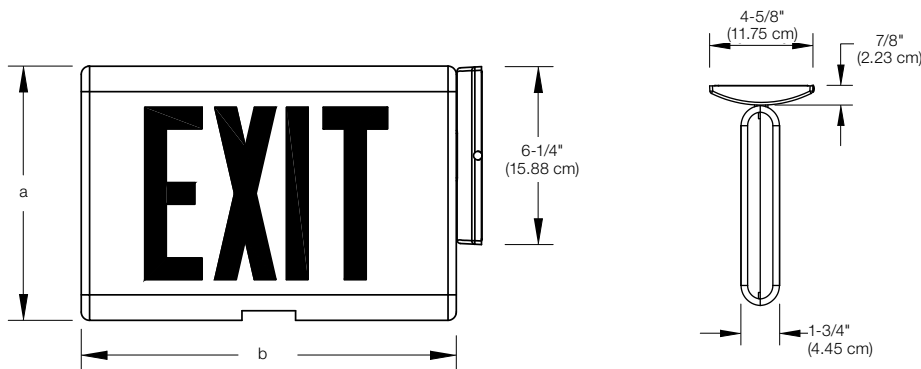

**Accessories** (Order as a separate item)

Description	Product code
Pendant mount white	GPW-*
Pendant mount black	GPB-*
Pendant mount gray	GPA-*
Wire guard (wall mount) (6 in.)	WG13-L
Wire guard (ceiling mount) (6 in.)	WG14-L
Wire guard (end mount) (6 in.)	WG15-L
Vandal shield (wall mount)	VRC
Vandal shield, NEMA-4X (wall mount)	VRC-4X

\* Specify pendant length (12", 24", 36", etc).

**Housing cabinet**

Letters	Dimension A	Dimension B
6" (15.24 cm)	8-7/8" (22.54 cm)	13-1/16" (33.18 cm)
8" (20.32 cm)	10-1/2" (26.67 cm)	15-1/4" (38.74 cm)

**Ordering format**

No. of faces	Series	Back plate/ Frame color	Legend color	Face plate color	Diagnostic option <sup>1</sup>	Options	Version
<b>Blank</b> = 6" single face	<b>GX</b> = AC/DC Only	<b>A</b> = Brushed aluminum	<b>R</b> = Red	<b>A</b> = Brushed aluminum	<b>Blank</b> = Standard	<b>Blank</b> = No option	<b>-N<sup>3</sup></b>
<b>2</b> = 6" double face	<b>GXE</b> = Self-powered	<b>B</b> = Black	<b>G</b> = Green	<b>B</b> = Black	Improved Diagnostics (non-audible)	<b>-DL</b> = Damp location screws	
<b>8</b> = 8" single face		<b>W</b> = White		<b>W</b> = White	<b>NEX</b> = Nexus <sup>®</sup> Wired <sup>2</sup> (consult your sales representative)	<b>-VR</b> = Vandal resistant screws	
<b>82</b> = 8" double face		<b>Optional</b> <b>DB</b> = Dark bronze (painted)		<b>Optional</b> <b>DB</b> = Dark bronze (painted)		<b>-LVR</b> = Vandal resistant polycarbonate lens and screws	
						<b>-Y</b> = Open faceplate and Special wording faceplate	
						<b>-2</b> = 2 Circuit (120/120 or 277/277, AC-Only)	

**Example: GXEARA-N**

<sup>1</sup> Available with Self-Powered GXE exit only

<sup>2</sup> NEX is CSA-US approved only

<sup>3</sup> Include on 6" models