



■ X4 LED Series

Steel LED Exit Signs and Combination Units
AC Only and Self-Powered
Sealed Maintenance-Free Lead Calcium
and Nickel-Cadmium Batteries
UL Listed

AC Only signs are UL listed for use in Damp Locations
The **X4 LED Series** exit signs and power pack combination units offer a complete package of features to make installation fast and easy.

▣ FEATURES

Reliability

The **X4 LED Series** has a three-year full warranty (excluding lamps and fuses).

Unit Data

The **X4 Series** is constructed of a rugged steel housing with programmable directional chevrons. All exit signs are universal and come standard with canopy kit, extra stencil and diffuser to permit any mounting either as single or double face. Long-life, energy-efficient red LED light source. Completely self-contained power pack provides a minimum of 90 minutes of emergency lighting.

Choice of Models

Exit Sign

Fully integrated circuitry includes a 2-wire 120-277Vac AC voltage input regulator, as well as an automatic, constant-current battery charger with solid-state transfer and AC-LED monitor and test switch.

Combination Units

Remote capacity –Lead Calcium Battery (E)

No heads = 26 Watts remote capacity

Two 6-watt ELF2 mounted heads = 12 Watts remote capacity

Remote capacity – Nickel-Cadmium Battery (EN)

No heads = 20 Watts remote capacity

Two 6-watt ELF2 mounted heads = 8 Watts remote capacity

Power Requirements

Dual Voltage 120/277Vac, 60Hz, 0.3/0.15 Amp

▣ OPTIONS

(Add Suffix to Model No.)	Suffix
AC/DC Remote (6-24Vdc)	-DC
Fire Alarm Flasher (power pack only)	-FAF
Dual Circuit (AC units only)	-2
Flasher/Buzzer (power pack only)	-FB
Open Face/Special Wording	-Y
NEXUS® wired	NEX
NEXUS® wireless	NEXRF

▣ ACCESSORIES

(Order as a separate item)

White Pendant	PW-*
Black Pendant	PB-*
Wire Guard (Exit-Ceiling or End Mount)	WG5-L
Wire Guard (Exit-Wall Mount)	WG12-L
Wire Guard (Combination Unit)	WG6-L

*Specify Pendant length (12", 24", 36" etc.)


▣ ORDERING FORMAT

U	X4	E	W	R	W	LED	/2M	-FB
Style	Model	Type	Color	Letter Color	Stencil	Light	Combo Unit	Options
U= Universal 2 faces & canopy	X4 Series	Blank= AC Only E= Self-Powered Lead Calcium with Power Pack EN= Self-Powered NICAD, with Power Pack N= Self-Powered (self-contained no additional power pack needed) (Exit Only)	W= White B= Black	R= Red G= Green	W= White B= Black A= Aluminum	LED= LED /0= 0 heads power use for remote fixtures /1L= 1 Large head /1M= 1 Mini head /2L= 2 Large heads /2M= 2 Mini heads	-DC=AC/DC Remote	



▣ DIMENSIONS

Dimensions are approximate and subject to change.

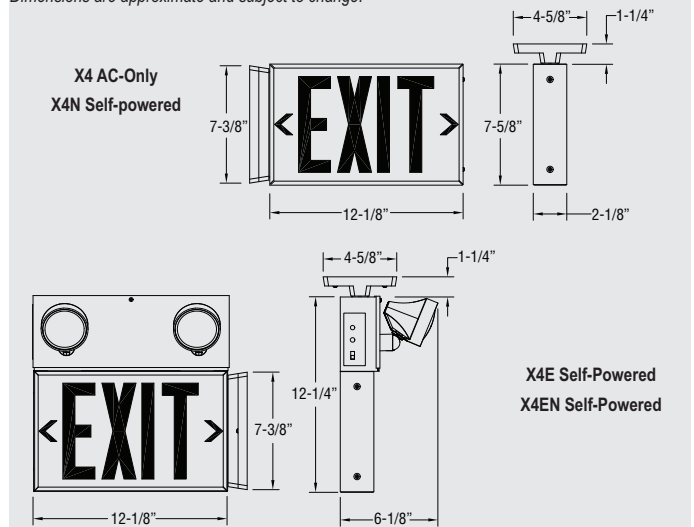

▣ POWER CONSUMPTION CHART (LED Exit)

Exit Sign	AC Specs		DC Specs	
	Model	AC Specs	DC Specs	DC Specs
Mini-Systems	AC-only	120 to 277Vac Less than 1.5W	-	-
	Self-powered	120 to 277Vac Less than 3W	Lead-Calcium Nickel-Cadmium	Min. 90 Minutes
Mini-Systems	120 to 277Vac	Less than 5W	See Unit Rating Chart	

▣ UNIT SELECTION CHART (Combination Unit)

Battery Type	DC Voltage	Model No.	Watts to 87.5% of rated battery voltage*			
			1 1/2 hrs.	2 hrs.	3 hrs.	4 hrs.
Lead-Calcium	6	X4E	30	20	14	10
Nickel-Cadmium		X4EN	24	18	12	9

*National Electrical Code Specification