

FF-AM Series

Self-Powered Fluorescent Fixture
Sealed Nickel-Cadmium Battery
Listed to UL 924 Standards



The FF-AM Series is a tamper- and vandalproof fluorescent fixture that combines the functions of normal area lighting and emergency lighting in one fixture.

APPLICATIONS

A virtually indestructible luminaire for areas subject to severe abuse. Suitable for schools, public restrooms, outdoor exits/entrances, terminals and other heavily accessed areas.

BATTERY

Long life, maintenance-free sealed Nickel-Cadmium.

ORDERING FORMAT

FF-AM ① ② ③ ④

- ①— FF-AM.....Series
- ②— -2No. of Lamp Sockets
- ③— -20Wattage of Lamps
- ④— -120Voltage of Fixture

LAMPS

Available with sockets for: one (1) 20 watt, one (1) 34 watt, two (2) 20 watt or two (2) 34 watt T12 lamps, or one (1) or two (2) 32-watt T8 lamps supplied by others.




UNIT SELECTION CHART

| MODEL | A | B | C | Lamp Type |
|--|---------|--------|--------|-----------|
| FF-AM-1-20-120 FF-AM-1-20-277 FF-AM-2-20-120 FF-AM-2-20-277 | 24-1/4" | 4-1/2" | 4-3/8" | F20T12 |
| FF-AM-1-34-120 FF-AM-1-34-277 FF-AM-2-34-120 FF-AM-2-34-277 | 48-1/4" | 4-1/2" | 4-3/8" | F34T12 |
| FF-AM-1-32-120 FF-AM-1-32-277 FF-AM-2-32-120 FF-AM-2-32-277 | 48-1/4" | 4-1/2" | 4-3/8" | F32T8 |

DIMENSIONS

Dimensions are approximate and subject to change.

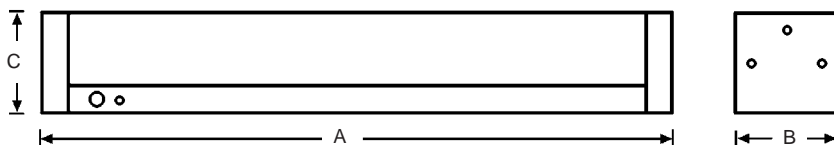

FEATURES

- **RELIABILITY:** The FF-AM Series has a three-year full warranty (excluding lamps and pilot lights).
- **HOUSING:**
 - ♦ Housing is constructed of 16 gauge steel and secured with tamper-proof screws. Tamper-proof screw driver bit is included.
 - ♦ Completely self-contained and maintenance-free.
 - ♦ Surface mounting.
- **DIFFUSER:** One piece injection molded .125" UV stabilized unbreakable polycarbonate lens. Features a prismatic pattern on the bottom and linear refractive sides for brightness control and 180° uniform light distribution.
- **BATTERY PACK:** High efficiency battery pack, complete with inverter charger and battery provides emergency power to one lamp in fixture for 90 minutes.
- **ELECTRONICS:**
 - ♦ Fully automatic solid-state charger.
 - ♦ Low voltage disconnect prevents overdischarge of battery.
- **CONTROLS:**
 - ♦ Pilot light and test switch.
- **POWER REQUIREMENTS:**
 - ♦ Battery pack is dual voltage 120/277 volt AC input supply. Voltage for fluorescent fixture must be specified 120 or 277V and is indicated by complete model number.