



# SERIES X3

TYPE: \_\_\_\_\_  
 CATALOGUE #: \_\_\_\_\_  
 NOTES: \_\_\_\_\_



The X3 Series exit signs and power packs combine versatility, energy efficiency and performance in a moderately-priced package.

## Extruded Aluminum LED Exits and Combination Units

*Sealed Maintenance-Free Lead Calcium or Nickel-Cadmium Battery  
 UL924 listed*

*AC-Only exit signs are UL listed for use in Damp Locations*



### Features

- Reliability**  
 The X3 Series has a three-year full warranty (less batteries and lamps).
- Unit Data**  
 The X3 Series housing is constructed of extruded aluminum and features universal chevrons. Universal exit signs are supplied with canopy kit, extra stencil and diffuser set to permit any mounting either as single or double face. Long-life, energy-efficient, ALINGAP technology LED light source reduces maintenance and energy costs. LED Combination units have additional 13-19 watts remote capacity with (2) 6-watt mounted heads, depending on the model.
- Light Source**  
 The unit comes standard with two 6 volt, 6-watt high intensity wedge base incandescent lamps. Other lamp options are available, please refer to Lamp Chart.
- Choice of Models**
  - Exit Sign**
  - = AC input: universal 2-wire 120 to 277Vac 50/60Hz
  - = AC/DC models: universal 2-wire 6 to 24Vdc
  - = Self-powered models: long-life, sealed **Nickel-Cadmium battery**
- Combination Units**
  - Remote capacity **Lead Calcium Battery (E)**
  - No heads = 30-Watts remote capacity**
  - Two 6-watt ELF2 mounted heads = 18 Watts remote capacity**
  - Remote capacity **Nickel-Cadmium Battery (EN)**
  - No heads = 24-Watts remote capacity**
  - Two 6-watt ELF2 mounted heads = 12 Watts remote capacity**
- Power Consumption**  
 120/277 Vac, 60Hz, 0.3/0.15 Amp (Combo unit)

### Unit Rating Chart


Total DC power available for local and remote emergency lights.						
Battery Type	DC Voltage	Model Number	*Watts to 87-1/2% of Rated Battery Voltage			
			1-1/2 Hrs.	2 Hrs.	3 Hrs.	4 Hrs.
Lead-Calcium	6	UX3E	30	20	15	10
Nickel-Cadmium	6	UX3EN	24	18	12	9

\*National Electrical Code Specification

### Power Consumption Chart

LED Exit Signs:				
Model	AC Specs		DC Specs	
AC-only	120 to 277Vac	Less than 1.5W	-	-
AC/DC	120 to 277Vac	Less than 1.5W	6 to 24Vdc	Less than 1.5W
Self-powered	120 to 277Vac	Less than 3W	Nickel-Cadmium	Min. 90 Minutes

# Specifications For Series X3

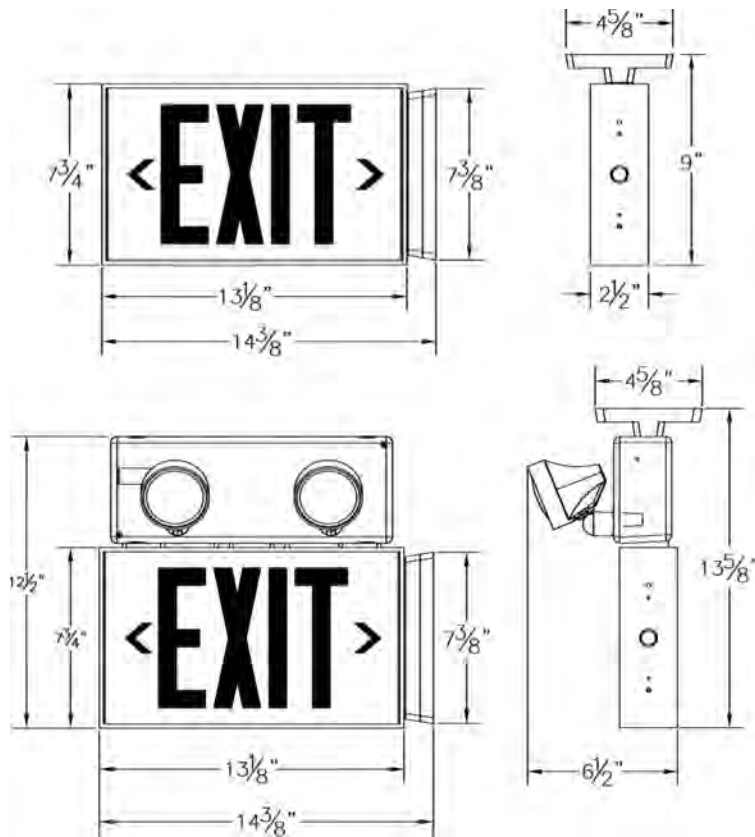

## Optional Features

Description	Add Suffix
AC/DC Remote (6-24Vdc) .....	-DC
Flasher/Buzzer (Power Pack combo only) .....	-FB

**Accessories** (order as a separate item)

277 Volt Conversion Kit-Black.....	CTXB-277
277 Volt Conversion Kit-White .....	CTXW-277
White Pendant.....	PW-*
Black Pendant .....	PB-*

\*Specify Pendant length (12", 24", 36", etc.)

## Ordering Information AC Only, Self-powered

Example: UX#ENBRALED/2MFB

Style	Model	Type	Color	Letter Color	Stencil	Light Source	Combo Unit	Options*
U= universal 2 faces & canopy	X3 Series	Blank= AC only	W= white	R= red	W= white	LED= LED	/O= 0 heads power use for remote fixtures	-DC= AC/DC remote
		E= self-powered lead-calcium	B= black	G= green	B= black		/1L= 1 large head	
		EN= self-powered nickel-cadmium			A= aluminum		/1M= 1 mini head	
							/2L= 2 large heads	
							/2M= 2 mini heads	



**Thomas & Betts**