



SERIES AM30

TYPE: _____
 CATALOGUE #: _____
 NOTES: _____



Linear Fluorescent Emergency Ballast

Listed to UL924 standard

- Meets or exceeds all NEC and Life Safety Code Emergency Lighting Requirements.

Sealed Maintenance-Free Batteries

- Long life high temperature Ni-Cad.
- Painted steel case.
- Dual voltage 120/277V, 60Hz.

Controls

- Includes test switch and charge indicator accessory kit.
- Selectable lamp leads for optimizing light output for desired lamp type.



LISTED

Technical Specifications

Input Voltage120/277V, 60Hz
 Input Wattage4.5 Watts
 Lamps Operated.....Most 2'- 8' single, bipin
 T8 & T12 HO or VHO fluorescent lamps incl. long
 compact, 42W 4-pin and 2"-4" 28W & 54W T5 lamps
 Emergency Operation.....(1) 2'- 8' or (2) 2'- 4' 90 minutes
 Initial Illumination.....(1) lamp up to 3000 lumens
 (2) lamps 1500 lumens each lamp
 Operating temp.....0° to 55°C
 Approval.....UL Listed
 Weight9.75 lbs

Operational Characteristics

The AM30 from Lightalarms is a UL Listed fluorescent emergency ballast that allows the same fixture to be used for both normal and emergency operation. In the event of a power failure, the AM30 switches to the emergency mode and operates one or two of the existing lamps for 90 minutes. The unit contains a battery, charger, and inverter circuit in a single can, and is provided with 2 feet of 3/8" flex for wiring to the fixture. The unit is designed for installation next to or on top of the fixture. The AM30 can be use with most 2' - 8' lamps, with an initial output of up to 3000 lumens for one or two lamps, and features lamp selector leads for optimizing light output for designated lamp types.

Standard Features

RELIABILITY


The FPS-HL comes complete with a 3-year warranty

UNIT DATA

- **Lumen output** (1) Lamp - 3000 Lumens
 (2) Lamps - 1500 lumens per Lamp
- **Lamps operated** Most 2'- 8' single, bipin, T8 & T12, HO or VHO Linear, 42W 4-pin and long compact fluorescent Lamps
- **Emergency Operation** 90 minutes (1) 2' - 8' or (2) 2' - 4'

Outline and Dimensions

Drawings are approximate and subject to change.

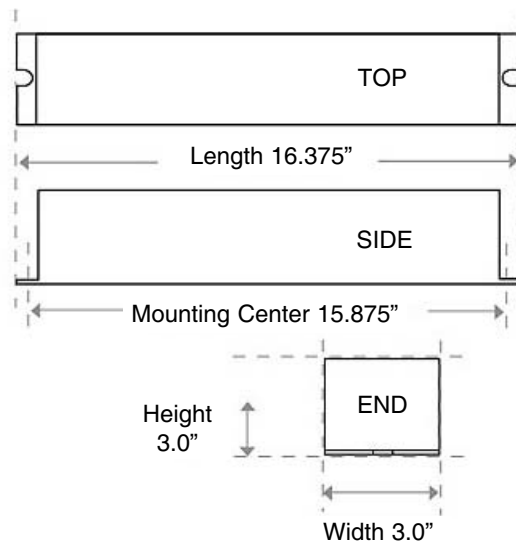

Ordering Information

Example: AM30

Series
AM30 = series



Thomas & Betts