

## Remote Head & Unit Head DR Series

### Metal MR16 lamp head



#### Description

- Indoor use
- Powder-coated die cast aluminum construction

#### Finish

Mist-white or black

#### Lamp type

Choice of MR16 LED lamp voltages and wattages

#### Mounting

- Surface mount
- Universal J-Box mounting

#### Warranty (subject to proper installation and maintenance)

Unit: three-year full warranty

Detailed warranty terms located on [page 182](#) or online at: [www.lightalarms.com](http://www.lightalarms.com)



#### Accessories (Order as a separate item)

| Description                   | Product code |
|-------------------------------|--------------|
| Wire Guard for DR1130, DR2130 | WG8-L        |
| Wire Guard for DR3130         | WG2-L        |


#### Ordering format

| Series              | Lamp suffix         | Color      |
|---------------------|---------------------|------------|
| DR1130= Single head |                     | -WH= White |
| DR2130= Double head | /_____ <sup>1</sup> | -BK= Black |
| DR3130= Triple head |                     |            |

**Example: DR1130/LD12-WH6**


<sup>1</sup>Choose from lamp selection chart

#### Dimensions (Dimensions are approximate and subject to change)

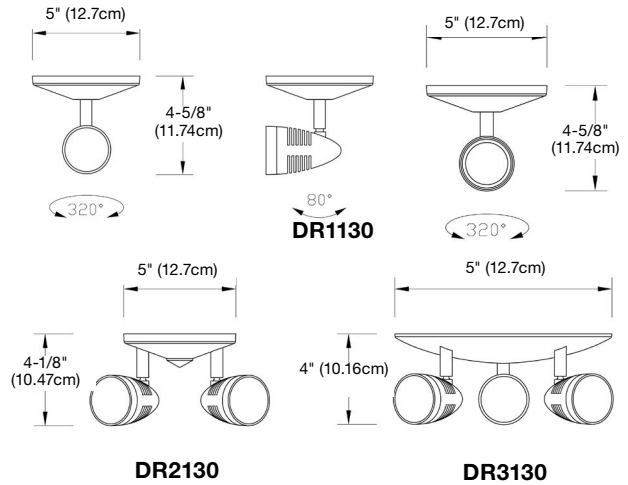

#### Photometric performance

| Lamp | Spacing center-to-center (feet) |                         |
|------|---------------------------------|-------------------------|
|      | 7 feet mounting height          | 15 feet mounting height |
| LD1  | 43'                             | 36'                     |
| LD2  | 81'                             | 64'                     |
| LD7  | 55'                             | 43'                     |
| LD9  | 71'                             | 56'                     |
| LD10 | 100'                            | 85'                     |
| LD13 | 56'                             | 44'                     |
| LD14 | 100'                            | 85'                     |
| LD25 | 43'                             | 39'                     |

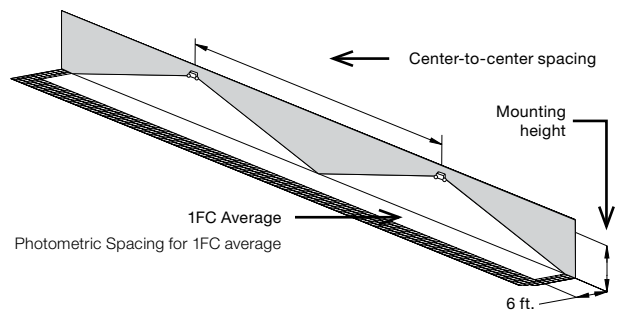

#### Lamp selection chart – MR16 LED lamps

| Lamp suffix | Voltage | Wattage | Lumens | Replacement # |
|-------------|---------|---------|--------|---------------|
| LD1         | 6       | 4       | 130    | 580.0097-L    |
| LD2         | 6       | 5       | 415    | 580.0122-L    |
| LD7         | 12      | 4       | 170    | 580.0093-L    |
| LD9         | 12      | 5       | 340    | 580.0104-L    |
| LD10        | 12      | 6       | 540    | 580.0106-L    |
| LD13        | 24      | 4       | 200    | 580.0098-L    |
| LD14        | 24      | 4       | 590    | 580.0100-L    |
| LD25        | 120     | 6       | 200    | 580.0010-L    |