

■ FF-AM Series



- Self-Powered Fluorescent Fixture
- Sealed Maintenance-free Nickel-Cadmium Battery
- Tamper Proof and Vandal Proof
- UL Listed

The FF-AM Series is a tamper and vandal resistant fluorescent fixture that combines the functions of normal area lighting and emergency lighting in one fixture.

□ FEATURES

Reliability

The FF-AM Series has a three-year full warranty (excluding lamps and pilot lights).

Unit Data

The housing of the FF-Am Series is constructed of steel and secured with tamper-proof screws. A tamper-proof screw driver bit is furnished standard with each unit. This series is completely self-contained and maintenance-free. The diffuser consists of an injection molded .125" UV stabilized, unbreakable polycarbonate lens. The lens features a prismatic pattern on the bottom and linear refractive sides for brightness control and 180° uniform light distribution. The FF-AM unit is available only as surface mount.

Lamp

Available with sockets for one (1), 20-watt, one (1), 34-watt, two(2), 20-watt or two(2) 34-watt T12 lamps, or one (1) or two(2) 32-watt T8 lamps supplied by others.

Charger

- Fully automatic solid-state charger.
- Low voltage disconnect prevents overdischarge of battery.

Controls


- Pilot light and test switch.

Power Requirements

Dual Voltage 120/277Vac, 60Hz, 3.5W

□ DIMENSIONS

Dimensions are approximate and subject to change.

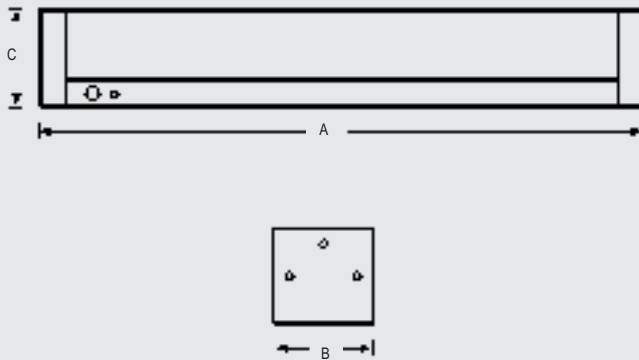

□ UNIT RATING CHART

Model	A	B	C	Lamp Type
FF-AM-1-20-120	24-1/4"	4-1/2"	4-3/8"	F20T12
FF-AM-1-20-277				
FF-AM-2-20-120				
FF-AM-2-20-277	48-1/4"	4-1/2"	4-3/8"	F34T12
FF-AM-1-34-120				
FF-AM-1-34-277				
FF-AM-2-34-120	48-1/4"	4-1/2"	4-3/8"	F32T8
FF-AM-2-34-277				
FF-AM-1-32-120				
FF-AM-1-32-277	48-1/4"	4-1/2"	4-3/8"	F32T8
FF-AM-2-32-120				
FF-AM-2-32-277				

□ ORDERING FORMAT

Series	No. of Lamp Sockets	Capacity Indicator	Fixture Voltage
FF-AM	-2	-20	-120