

## ELF640 Series

ELF640 vandal resistant



### Description

- ELF640 & ELF640P vandal resistant for indoor use with choice of cast aluminum or plastic back plate
- Include clear polycarbonate UV impact resistant cover

### Lamp type

Choice of MR16 LED lamp voltages and wattages

### Mounting

- Surface Mount
- Universal J-Box mounting

### Approvals

- UL 924 Listed
- Vandal Resistant


**Warranty** (subject to proper installation and maintenance)

Unit: five-year full warranty

Detailed warranty terms located on [page 182](#) or online at: [www.lightalarms.com](http://www.lightalarms.com)




**Dimensions** (Dimensions are approximate and subject to change)

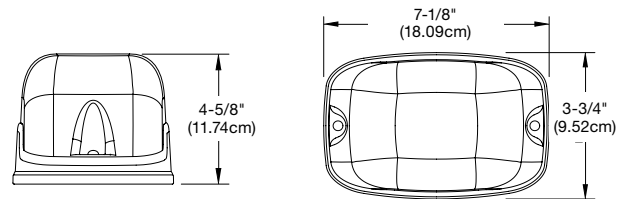

### Photometric performance

Lamp	Spacing center-to-center (feet)	
	7 feet mounting height	15 feet mounting height
LD1	39'	34'
LD7	49'	39'
LD9	68'	54'
LD10	89'	80'
LD13	51'	39'
LD25	43'	39'

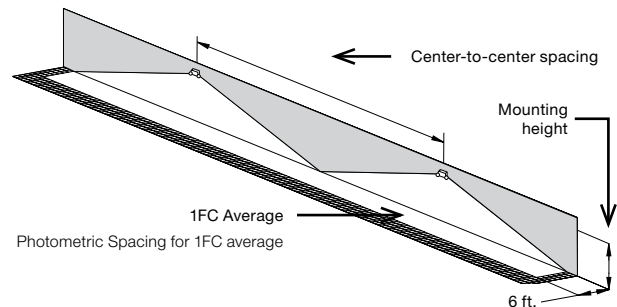

### Lamp selection chart

Lamp suffix	Voltage	Wattage	Lumens	MR 16 LED lamps	
				Replacement #	
LD1	6	4	130	580.0097-L	
LD7	12	4	170	580.0093-L	
LD9	12	5	340	580.0104-L	
LD10	12	6	510	580.0106-L	
LD13	24	4	200	580.0098-L	
LD25	120	4	204	580.0095-L	

### Ordering format

Series	Lamp suffix	Color	Voltage	Options
ELF640P= All polycarbonate single head for dry location	/_____ <sup>1</sup>	-M= White	6= 6 VDC	Blank= no option
ELF640PD= All polycarbonate double head for dry location		-B= Black	12= 12 VDC	T= tamper proof screws
ELF640= Die-Cast back plate single head for dry location		-G= Gray	24= 24 VDC	
ELF640D= Die-Cast back plate double head for dry location			120= 24 VDC/VAC	

**Example: ELF640D/LD7-M12**

<sup>1</sup>Choose from lamp selection chart