

LADL Linear Emergency Fluorescent Battery pack

Convert new or existing fluorescent fixtures into emergency lighting units
emergency ballast



Housing

- Low profile steel housing contains, battery, battery charger, transfer circuit and high frequency inverter
- Optional end caps available
- Operating temperature 68°F to 122°F (20°C to 50°C)

Mounting

- Internal or external mounting to a fluorescent fixture

Lamp type operation

- Refer to ballast/Lamp reference chart for specific lamp type page 135


Electronics

- Can be wired to operate switched, un-switched or normally off fixtures without affecting normal operation
- Will cold start and illuminate lamps
- Dual voltage 120/277VAC, 2.5W

Controls

- Momentary test switch allows for quick operational check of entire system

Dimensions (Dimensions are approximate and subject to change)

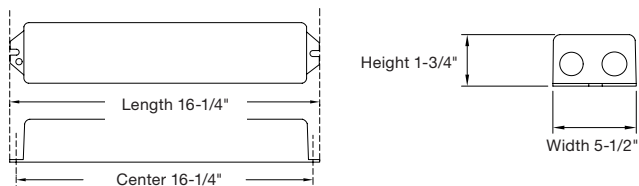

Sealed maintenance-free battery

- Nickel-Cadmium battery
- Provides 90 minutes of emergency operation

Approvals

- UL 924 Listed Damp location I (50°F to 104°F)
- Damp location listed



Warranty (subject to proper installation and maintenance)

Ballast: five-year full warranty

Detailed warranty terms located on [page 182](#) or online at: www.lightalarms.com



Accessories (order as a separate item)

Description	Suffix
 External mounting kit includes wire bundle cover	071139-E
Remote test switch (Metal faceplate)	RTS
Remote test switch (Plastic faceplate)	RTS-1
Recommended for inaccessible locations. Test switch and charging indicator on a single mounting plate.	
Replacement Test Switch	TBTSP-E

Ordering information

Series

LADL32
LADL7
LADL12
LADL30-N

Example: LADL32