



X3 Series

Extruded Aluminum LED Exits and Combination Units Sealed Maintenance-free Lead Calcium or Nickel-Cadmium Battery

UL Listed

AC-Only exit signs are UL listed for use in Damp Locations

The X3 Series exit signs and power packs combine versatility, energy efficiency and performance in a moderately-priced package.

FEATURES

Reliability

The X3 Series has a three-year full warranty (less batteries and lamps).

Unit Data

The X3 Series housing is constructed of extruded aluminum and features universal chevrons and a bottom aperture that provides a down-light effect. Universal exit signs are supplied with canopy kit, extra stencil and diffuser set to permit any mounting either as single or double face. Long-life, energy-efficient, ALINGAP technology LED light source reduces maintenance and energy costs. LED Combination units have additional 13-19 watts remote capacity with (2) 6-watt mounted heads, depending on the model.

Light Source

The unit comes standard with two 6 volt, 6-watt high intensity wedge base incandescent lamps. Other lamp options are available, please refer to Lamp Chart.

Choice of Models

Exit Sign

- = AC input: universal 2-wire 120 to 277Vac 50/60Hz
- = AC/DC models: universal 2-wire 6 to 24Vdc
- = Self-powered models: long-life, sealed Nickel-Cadmium battery

Combination Units

- Remote capacity –Lead Calcium Battery (E)
- No heads = 30-Watts remote capacity
- Two 6-watt ELF2 mounted heads = 18 Watts remote capacity
- Remote capacity – Nickel-Cadmium Battery (EN)
- No heads = 24-Watts remote capacity
- Two 6-watt ELF2 mounted heads = 12 Watts remote capacity

Power Consumption

120/277 Vac, 60Hz, 0.3/0.15 Amp (Combo unit)

OPTIONS

(Add Suffix to Model No.)

- AC/DC Remote (6-24Vdc)-DC
- Flasher/Buzzer (Self-powered signs only)-FB

ACCESSORIES


(Order as a separate item)

- 277 Volt Conversion Kit-BlackCTXB-277
- 277 Volt Conversion Kit-WhiteCTXW-277
- White PendantPW-*
- Black PendantPB-*

*Specify Pendant length (12", 24", 36", etc.)



DIMENSIONS

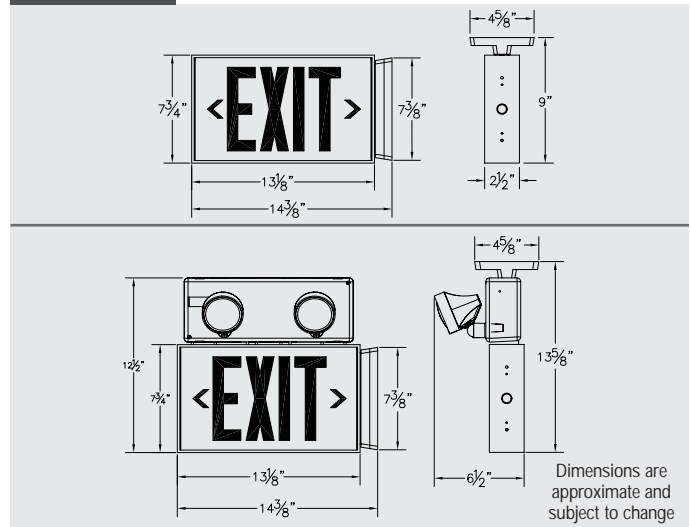

UNIT RATING CHART

Total DC power available for local and remote emergency lights.

Battery Type	DC Voltage	Model Number	*Watts to 87-1/2% of Rated Battery Voltage			
			1-1/2 Hrs.	2 Hrs.	3 Hrs.	4 Hrs.
Lead-Calcium	6	UX3E	30	20	15	10
Nickel-Cadmium	6	UX3EN	24	18	12	9

*National Electrical Code Specification

POWER CONSUMPTION CHART

LED Exit Signs:

Model	AC Specs		DC Specs	
AC-only	120 to 277Vac	Less than 1.5W	-	-
AC/DC	120 to 277Vac	Less than 1.5W	6 to 24Vdc	Less than 1.5W
Self-powered	120 to 277Vac	Less than 3W	Nickel-Cadmium	Min. 90 Minutes

ORDERING FORMAT

U	X3	EN	B	R	A	LED	/2M	-FB
Style U=Universal 2 faces & canopy	Model X3 Series	Type Blank=AC Only E=Self-Powered Lead-Calcium EN=Self-Powered Nickel-Cadmium	Color W=White B=Black	Letter Color R=Red G=Green	Stencil W=White B=Black A=Aluminum	Light Source LED=LED	Combo Unit /0=0 heads power use for remote fixtures /1L=1 Large head /1M=1 Mini head /2L=2 Large heads /2M=2 Mini heads	Options -FB=Flasher/ Buzzer