



Simplicity Economizer™ Series

Recessed Ceiling Mount Edge-lit Exit Sign

Exit Signs

The **Simplicity Economizer™** – Recessed ceiling mount edge-lit exit sign combines a modular design with state of the art technology and ease of installation including field installable stick-on directional chevrons.




FEATURES

- Rugged, 20-gauge steel back box
- Equipped with bar hanger kit for easy installation
- Formed steel flat trim plate
- Choice of finishes: textured aluminum or off-white
- Acrylic panel with curved contour provides superior clarity and illumination
- Legend with a choice of red or green letters
- Choice of legend background: clear, white (red legend only) or mirror
- Stick-on translucent directional chevrons for field installation
- Simple, two-wire universal AC input (120V to 277Vac 50/60Hz) prevents installation errors
- Sealed Nickel-Cadmium batteries provide 90 minutes of emergency lighting
- Simple, two-wire universal DC input: 6V to 24Vdc
- Long-life LED light assures low maintenance costs and superior illumination
- Energy efficient power consumption: less than 2.5 Watts for single or double face legends
- UL-924 listed

DIMENSIONS

Dimensions are approximate and subject to change.

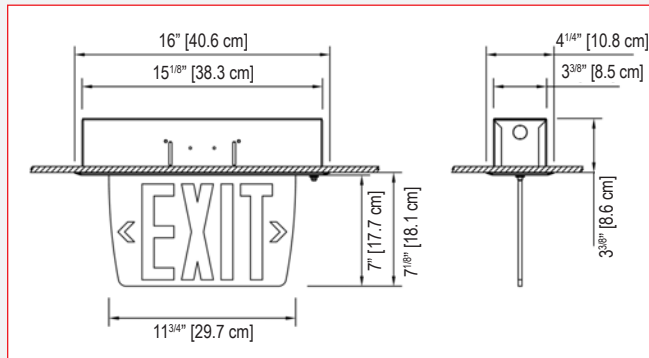

TYPICAL SPECIFICATIONS

Supply and install the **Lightalarms® Economizer™** Series recessed edge-lit exit sign. The unit shall operate with universal two-wire AC input voltage from 120Vac to 277Vac at less than 2.5 Watts for single and double face legends. The housing assembly shall be of rugged 20-gauge steel and shall include a bar hanger kit for easy installation. The trim plate shall be low-profile and manufactured of formed steel with a textured finish and _____ color. The light source shall be eight (8) long-life LEDs installed on a PCB strip. Red LED technology shall be ALINGAP. The whole electrical circuit shall be contained in a plastic housing fixed on the trim plate. The acrylic panel shall have a curved contour. The legend shall have six-inch high with 3/4-inch stroke red letters on a clear background, unless otherwise specified. The unit shall be equipped with stick-on translucent directional chevrons, to be installed in the field as required by the Code.

The exit sign in a self-powered configuration shall be equipped with sealed Nickel-Cadmium batteries and perform minimum 90 minutes of emergency illumination upon AC failure.

The equipment shall be UL-924 listed.

The equipment shall be **Lightalarms®** Model - _____.

POWER CONSUMPTION CHART

Model	AC Specs		DC Specs	
AC-only	120 to 277Vac	Less than 1.5 W	-	
AC/DC-remote	120 to 277Vac	Less than 1.5 W	6 to 24Vdc	Less than 1.5 W
Self-powered	120 to 277Vac	Less than 2.5 W	Ni-Cd battery	Min. 90 minutes

UNIT WARRANTY

Unit carries a 5-year full warranty.

ORDERING FORMAT

Series	Trim	Housing Color	Legend Color	Face
SE= AC Only SES= AC/DC SEN= self-powered	F= recessed flat trim	TA= textured aluminum OW= off white <i>For other colors, please contact your sales representative.</i>	RC= red on clear* RW= red on white RM= red on mirror GC= green on clear* GM= green on mirror <i>Green on white not available. *Single face only.</i>	1= single face 2= double face

Example: SEFOWRC1



www.lightalarms.com

Thomas&Betts