

## Galaxy™ Slim TX & TXE Series

Die-cast aluminum slim profile exit sign



### Construction

- Die-cast aluminum
- 6 inch EXIT lettering legend, available in red or green
- Choice of finishes: all white, or black with brushed aluminum faceplate
- Field-selectable chevrons


### Mounting

- Surface mount
- Canopy included for end or ceiling mount applications
- Universal J-box mounting

### Electronics

Compatible with Lightalarms Mini Inverters (contact your sales representative for more information)

**Dimensions** (Dimensions are approximate and subject to change):

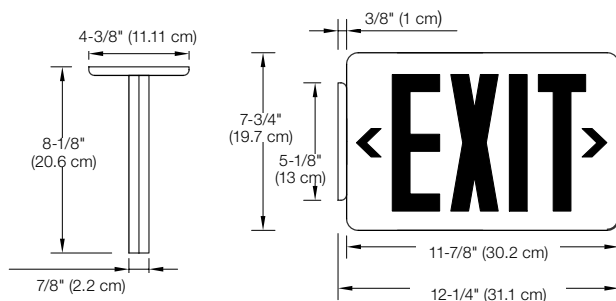

### Approvals

- UL 924 listed
- Damp location optional  
50°F to 104°F (10°C to 40°C)
- Meets NFPA101 (Life Safety Code), NFPA 70 NEC, OSHA illumination standards

### Warranty

Three-year full warranty

Detailed warranty terms located on [page 197](#) or online at: [www.lightalarms.com](http://www.lightalarms.com)



### Power consumption chart

Model	AC Specs	DC Specs
AC-only	120/277VAC, 60Hz, Typical 1W (Less than 1.5W)	-
Self-powered	120/277VAC, 60Hz, Less than 3.3W (Less than 1.5)	Nd-Cd battery (Min. 90 mins)


### Accessories (Order as a separate item)

Product code	Description
WG1-L	Wire Guard (Wall Mount)
WG5-L	Wire Guard (Ceiling Mount & End Mount)

### Face plate color



Brushed aluminum



White

### Ordering format

No. of faces	Series	Backplate color	Legend color	Face plate color
Blank= Single face	TX= AC-Only	W= White	R= Red	W= White (only available with white backplate)
2= Double face	TXE= Self-powered	B= Black	G= Green	A= Brushed aluminum (only available with black backplate)

**Example: TXEWRW**