

# Genesis<sup>™</sup> 'Over The Door & Floor Proximity' Tandem Series

Single and double face, surface and recessed\* mount edge-lit exit sign



#### Construction

- DX, DXN 'Over the door' exit faceplate, backplate and canopy are made of die-cast aluminum
- DX, DXN offers 6 inch EXIT lettering legend, available in red or green
- LL "Floor Proximity" exit faceplate is made of die-cast aluminum; backbox is made of steel
- LL offers 6 inch EXIT lettering legend, available in red or green
- Choice of finishes: white, black or brushed aluminum
- Universal field selectable chevrons

## Mounting

- GXM, GXEM surface mount only
- Canopy included for ceiling mount applications
- Backplate features universal knockouts for a standard
   4 inch junction box, used in wall mount applications
- FPGXLD surface mount or recessed mount
- Single face model only

#### **Special Wording Panel**

Not available

#### **Electronics**

- Standard Improved Diagnostics on GXEM
- Optional Nexus® monitoring system
- 120-277 60Hz

#### **Approvals**

- CSA-US (To UL 924 standards)
- Meets NFPA101 (Life Safety Code), NFPA 70 NEC, OSHA illumination standards

Warranty (subject to proper installation and maintenance)

Five-year limited warranty

Detailed warranty terms located on page 197 or online at: www.lightalarms.com





#### Power consumption chart

Model		AC Specs	DC Specs
	AC-Only	120/277VAC, 60Hz (1.5W)	-
Red	AC-2 Circuit	120/120VAC & 277/277VAC, 60Hz (2.6W)	-
	Self-powered	120/277VAC, 60Hz (3.8W)	Nickel-Cadnium battery (Min. 90 minutes)
	AC-Only	120/277VAC, 60Hz (0.9W)	-
Green	AC-2 Circuit	120/120VAC & 277/277VAC, 60Hz (3.3W)	-
	Self-powered	120/277VAC, 60Hz (5W)	Nickel-Cadnium battery (Min. 90 minutes)

## Accessories (Order as a separate item)

Description	Product code
Wire Guard	WG11-L

#### Frame/Face plate color








Brushed aluminum

Black

White




**Dimensions** (Dimensions are approximate and subject to change):

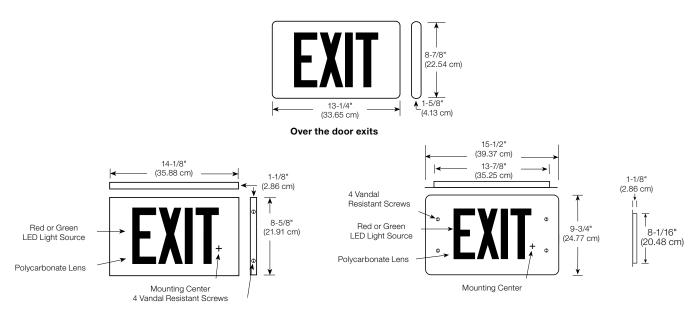

Floor proximity surface mount exits

Floor proximity recessed mount exits

How to order typical applications (Must be ordered as a Tandem, over the door with a floor proximity Exit sign):

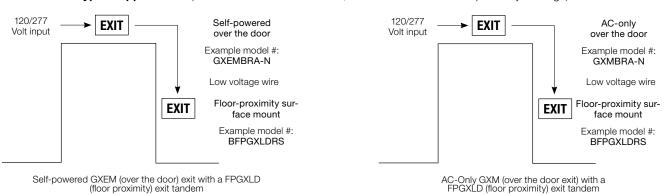

Ordering format (Must order 'Over the Door' GX or GXM Exit sign and a "Floor Proximity" FP-GL exit sign as a tandem)

#### Over the door exit sign

Series	Frame color	Legend color	Face plate color	Version	Option
<b>GXM</b> = AC-Only or 2 circuit model <b>GXEM</b> = Self-powered	<ul><li>A= Brushed Aluminum Body</li><li>B= Black Body</li><li>W= White Body</li></ul>	R= Red G = Green	<ul><li>A= Brushed Aluminum</li><li>B= Black</li><li>W= White</li></ul>	-N	<b>-2</b> = 2 circuit (120/120 or 277/277) (For use with GXM Series)
Example: GXEMBRA-N					

### Floor proximity exit sign

Frame color	Series	Legend color	Trim	Option
A= Brushed aluminum body B= Black body W= White body	FPGXLD= Floor Proximity Exit	<b>R</b> = Red <b>G</b> = Green	R= Recessed mount S= Surface mount	<b>LVR</b> = Vandal resistant polycarbonate lens and screws
Example: AFPGXLDRR				