

LAXC LED Series

Combination unit with light bar



Construction


- Off-white UV stabilized thermoplastic enclosure
- 6 inch EXIT lettering legend, available in red or green
- Universal single or double face
- Field selectable chevrons
- Light bar consumes 4.5 watts
- Adjustable lens for optimal light output
- 5VA Flame retardant thermoplastic
- Remote capacity for (1) ELF612D/LED or (2) ELF612/LED

Mounting

- Surface and wall mount
- Canopy included for end or ceiling mount application
- Universal J-box mounting

Photometric performance

Spacing center-to-center (feet)
7.5 feet mounting height
12'

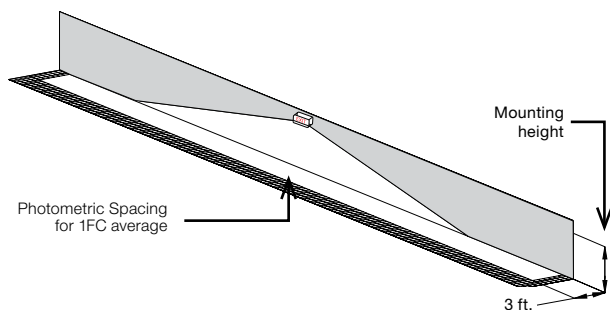

Ordering format

Series	Legend color
LAXC= Combination unit with light bar	-RLP= RED with light bar -GLP= GREEN with light bar

Example: LAXC-RLP

Electronics

- 120/27760 Hz
- 4.8V long life nickel cadmium battery

Approvals

- UL 924 listed
- Damp location 32°F to 122°F (0°C to 50°C)

Warranty

Three-year full warranty

Detailed warranty terms located on **page 182** of the catalog or online at: www.lightalarms.com



Accessories (Order as a separate item)


Product code	Description
Wire guard (wall mount)	WG1-L
Wire guard (ceiling or end mount)	WG5-L
Pendant white	PW*

*Specify length of pendant (12", 24", 36" etc.)

Power consumption chart

Model	AC Specs	DC Specs
LAXC-RLP	120/277VAC, 7.5W	4.8V nickel-cadmium battery (min. 90 minutes)
LAXC-GLP	120/277VAC, 7.5W	4.8V nickel-cadmium battery (min. 90 minutes)

Dimensions (Dimensions are approximate and subject to change):

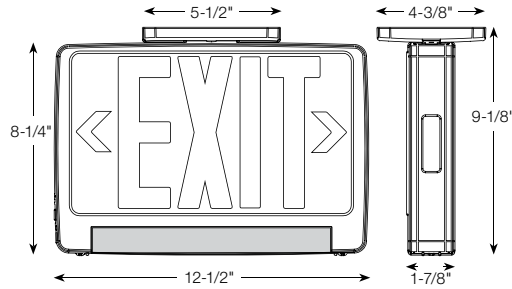

ELF612D/LED Series

Thermoplastic square LED outdoor remote heads



Housing

- ELF612D/LED remote series is multi-volt 3.6, 6 or 12V, 3W total
- Thermoplastic housing and aluminum canopy with fully adjustable LED heads
- Suitable for outdoor application
- Suitable for wet location applications
- Wall or ceiling mount
- Available only in gray double head configuration


Approvals

- UL924 Listed

Warranty (subject to proper installation and maintenance)

Three-year full warranty

Dimensions (Dimensions are approximate and subject to change):

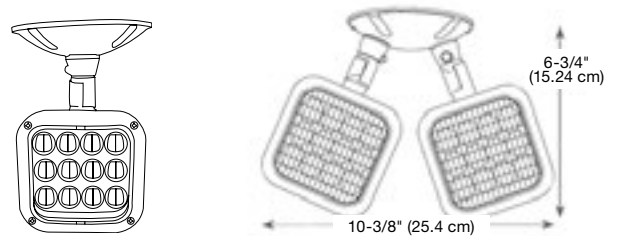

Ordering format – ELF612D/LED Series

Series	Options
ELF612D= Double	LED= Thermoplastic square LED head
ELF612= Single	

Example: ELF612D/LED