

## LAXC LED Series

Combination unit with light bar



### Construction


- Off-white UV stabilized thermoplastic enclosure
- 6 inch EXIT lettering legend, available in red or green
- Universal single or double face
- Field selectable chevrons
- Light bar consumes 4.5 watts
- Adjustable lens for optimal light output
- 5VA Flame retardant thermoplastic
- Remote capacity for (1) ELF612D/LED or (2) ELF612/LED

### Mounting

- Surface and wall mount
- Canopy included for end or ceiling mount application
- Universal J-box mounting

### Photometric performance

Spacing center-to-center (feet)
7.5 feet mounting height
12'

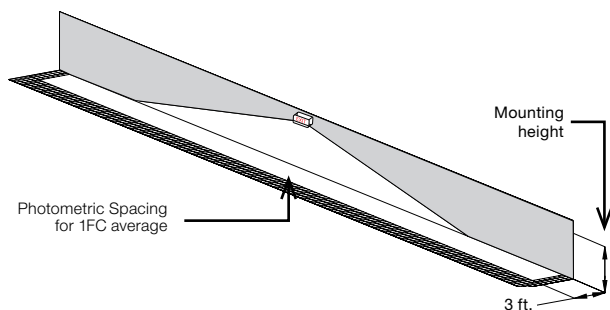

### Ordering format

Series	Legend color
LAXC= Combination unit with light bar	-RLP= RED with light bar -GLP= GREEN with light bar

Example: LAXC-RLP

### Electronics

- 120/27760 Hz
- 4.8V long life nickel cadmium battery

### Approvals

- UL 924 listed
- Damp location 32°F to 122°F (0°C to 50°C)

### Warranty

Three-year full warranty

Detailed warranty terms located on **page 197 of the catalog** or online at: [www.lightalarms.com](http://www.lightalarms.com)



### Accessories (Order as a separate item)


Product code	Description
Wire guard (wall mount)	WG1-L
Wire guard (ceiling or end mount)	WG5-L
Pendant white	PW*

\*Specify length of pendant (12", 24", 36" etc.)

### Power consumption chart

Model	AC Specs	DC Specs
LAXC-RLP	120/277VAC, 7.5W	4.8V nickel-cadmium battery (min. 90 minutes)
LAXC-GLP	120/277VAC, 7.5W	4.8V nickel-cadmium battery (min. 90 minutes)

**Dimensions** (Dimensions are approximate and subject to change):

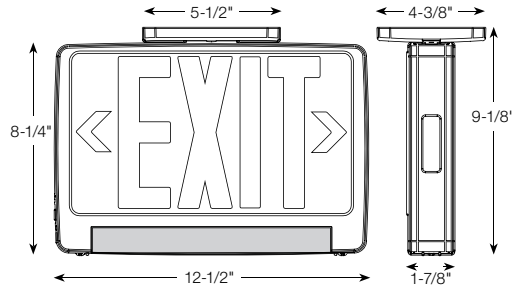

### ELF612D/LED Series

Thermoplastic square LED outdoor remote heads



**Housing**

- ELF612D/LED remote series is multi-volt 3.6, 6 or 12V, 3W total
- Thermoplastic housing and aluminum canopy with fully adjustable LED heads
- Suitable for outdoor application
- Suitable for wet location applications
- Wall or ceiling mount
- Available only in gray or black, single or double head configuration


**Approvals**

- UL924 Listed

**Warranty** (subject to proper installation and maintenance)

Three-year full warranty

**Dimensions** (Dimensions are approximate and subject to change):

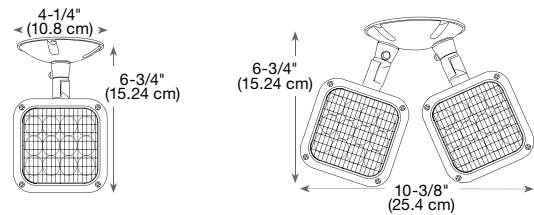

**Ordering format – ELF612D/LED Series**

Series	Options	Color
ELF612= Single	/LED= Thermoplastic square LED head	<b>Blank</b> = Gray
ELF612D= Double		<b>BK</b> = Black

**Example: ELF612D/LED**