

## Simplicity Universal Combination Edge-Lit Series

Extruded aluminum edge-lit combo



### Construction

- Extruded aluminum housing and trim plate
- Brushed aluminum finish
- Trim plate includes two fully tool-free adjustable, 2.5W LED heads, 400 Lumens each
- Acrylic panel featuring 6 inch silk-screened EXIT legend with field selectable chevrons
- Single face red or green on clear, double face red or green on mirror

### Mounting

- Wall and ceiling surface and recessed mount
- Universal mounting on wall or ceiling, for surface or recessed applications
- Adjustable bar hanger included for recessed applications

### Electronics

- High temperature long life Nickel Metal Hydride battery provides 90 minutes of emergency operation
- 120/277VAC 60Hz
- Optional: Improved Diagnostics

### Approvals

- UL 924 listed
- Damp location 41°F to 104°F (5°C to 40°C)

### Warranty (subject to proper installation and maintenance)


Unit has a three-year limited warranty

Detailed warranty terms located online at: [www.lightalarms.com](http://www.lightalarms.com)




### Photometric performance

	Spacing center-to-center (feet)
Series	7.5 feet mounting height
C6UEN*6	30'

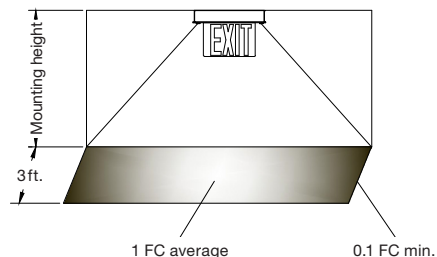


**Dimensions** (dimensions are approximate and subject to change):


**Surface ceiling mount**

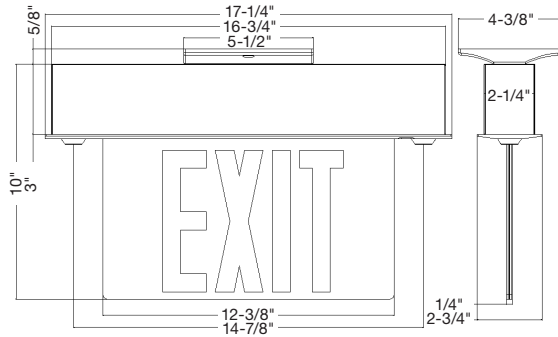


**Surface recessed wall mount**

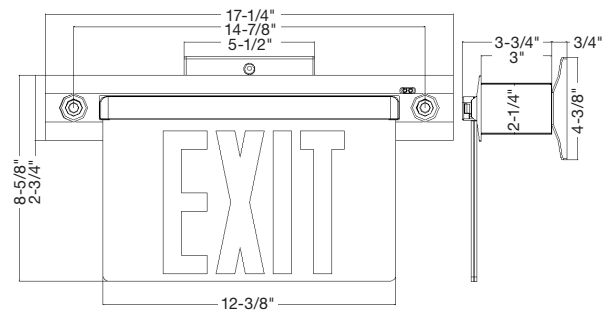

**Recessed ceiling mount**

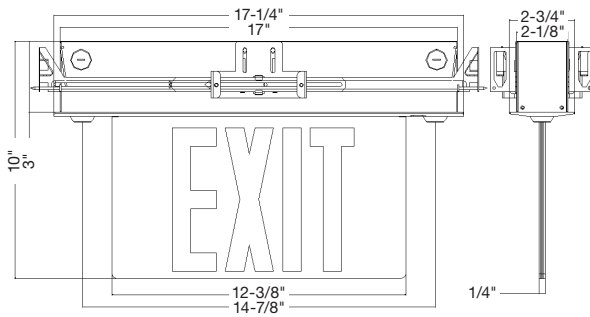

**Recessed wall mount**

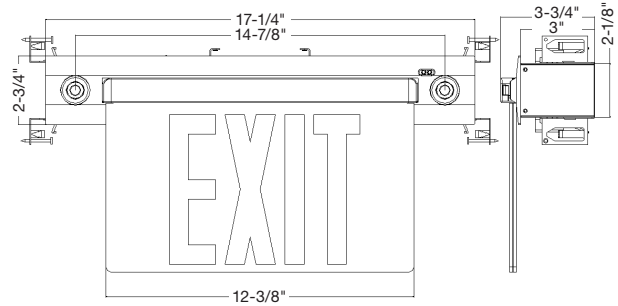

**Power consumption chart**

Series	AC input	Voltage	Battery
C6UENRM-2HO	120/277VAC, 60Hz	3.6V	NiHM 1800mAH
C6UENGM-2HO			NiHM 1800mAH
C6UENRM-2HO-ID			NiHM 2500mAH
C6UENGM-2HO-ID			NiHM 2500mAH

**Ordering format**

Model	Legend	Series	Legend color	Heads	Options
<b>C</b> = Combo	<b>6</b> = 6" EXIT single and double face with universal chevrons and mounting for surface or recessed	<b>UEN</b> = Self-powered	<b>RM</b> = Red <b>GM</b> = Green	<b>2HO</b> = Two high output LED heads	<b>Blank</b> = Standard <b>ID</b> = Improved Diagnostics

**Example: C6UENRM-2HO-ID**