



TAMPERPROOF & VANDALPROOF

Self-Powered Fluorescent Fixture Sealed Nickel Cadmium Battery



application Incorporates the functions of normal area lighting and emergency lighting into one fixture. Ideal for areas such as stairwells, halls and bathrooms where an easily installed, tamper-proof dual purpose fixture is required.

features

- HOUSING:** Housing is constructed of 16 gauge steel and secured with tamper-proof screws. Tamper-proof screw driver is included.
 - Completely self-contained and maintenance-free.
 - Provided with high-impact polycarbonate lens.
 - Surface mounting.
- BATTERY PACK:** High efficiency battery pack, complete with inverter charger and battery provides emergency power to one lamp in fixture for 90 minutes.
- ELECTRONICS:**
 - Fully automatic solid-state charger.
 - Low voltage disconnect prevents overdischarge of battery.
- CONTROLS:** Pilot light and test switch.
- POWER REQUIREMENTS:** Battery pack is dual voltage 120/277 volt AC input supply. Voltage for fluorescent fixture must be specified 120 or 277V and is indicated by complete model number.

battery

Long life, maintenance-free sealed nickel cadmium.

Battery warranty: Three (3) year full warranty with additional Seven (7) years pro-rata.

lamps

Available with sockets for: one (1) 20 watt, one (1) 40 watt, two (2) 20 watt or two (2) 40 watt fluorescent lamps. (Lamps supplied by others.)


ordering format

FF-AM	1	20	120V
Series	No. of Lamp Sockets	Wattage of Lamps	Voltage of Fixture

(See dimension chart for list of model numbers.)

dimensions and selection chart

Model	Dimensions		
	A	B	C
FF-AM-1-20-120V	24 1/2"	4 1/2"	4 1/2"
FF-AM-1-20-277V			
FF-AM-2-20-120V			
FF-AM-2-20-277V			
FF-AM-1-40-120V	48 1/2"	4 1/2"	4 1/2"
FF-AM-1-40-277V			
FF-AM-2-40-120V			
FF-AM-2-40-277V			

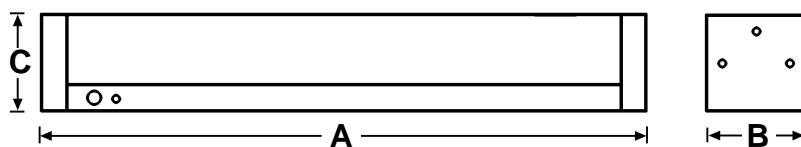

Dimensions are approximate and subject to change.