


# REMOTE FIXTURES



Supplied complete with lamps as specified in model number. For alternate lamp selection, see lamp chart on pages 62-63.

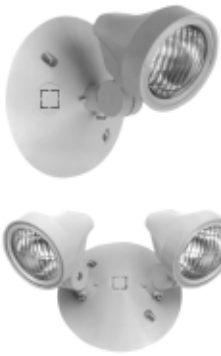

## ELF2, ELF2D



**DESCRIPTION:** Single, double or triple PAR 18 size indoor lighting head with fully adjustable swivel; all thermoplastic construction.

**FINISH:** Mist white, black

**LAMPS:** Wedge base incandescent

**VOLTS:** 6 or 12 volt  
Maximum watts: 18



## ELF605




**DESCRIPTION:** Recessed round gimbal fixture with welded steel housing and plastic (ELF605P) or metal (ELF605M) trim. Lamp has a horizontal rotation of 358° and vertical angle adjustable to 42°.

**FINISH:** White (standard) chrome on request

**MOUNTING:** Recessed (wall or ceiling). Plaster frame and standard 4" wire box provided.

**LAMPS:** Double contact bayonet base or wedge base incandescent

**VOLTS:** 6, 12, 24, 32/36 or 120  
Maximum watts: 25 (6 watts for 120v)

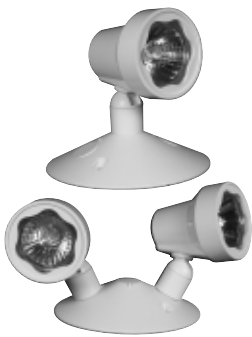

## ELF3, ELF3D



**DESCRIPTION:** Single or double PAR 18 size indoor lighting heads with fully adjustable swivel. All thermoplastic construction.

**FINISH:** Mist white, black

**LAMPS:** MR16

**VOLTS:** 6 or 12VDC  
Maximum watts: 20



## ELF606

**DESCRIPTION:** Round, surface mounted gimbal fixture with welded steel housing. Lamp has a horizontal rotation of 358° and vertical angle adjustable to 42°.

**FINISH:** Housing: Matte white  
Trim: White

**MOUNTING:** Surface (wall or ceiling). 1/2" or 3/4" knockout provided.

**LAMPS:** Sealed beam incandescent

**VOLTS:** 6 or 12 volt  
Maximum watts: 25



## ELF603



**DESCRIPTION:** Rectangular fixture with diffusing lens. Welded steel housing.

**FINISH:** White enamel.

**MOUNTING:** Surface (wall or ceiling). Knockouts provided on 2 sides and back.

**LAMPS:** Double contact bayonet base

**VOLTS:** 6, 12, 24, 32/36 or 120  
Maximum watts: 18



## ELF610



**DESCRIPTION:** Recessed adjustable eyeball fixture, can be rotated through 358° and adjustable to 42°.

**FINISH:** White enamel

**MOUNTING:** Recessed (wall or ceiling). Plastic frame provided.

**LAMPS:** Double contact bayonet base or wedge base incandescent

**VOLTS:** 6, 12, 24, 32/36 or 120  
Maximum watts: 25



## ELF604



**DESCRIPTION:** Recessed rectangular fixture with diffusion lens and welded steel housing.

**FINISH:** Mist white enamel.

**MOUNTING:** Recessed (wall or ceiling). Knockouts on two sides and back. Adjustable mounting clips provided. Fits opening of 6-1/2" x 3-1/4" x 2-3/4" deep.

**LAMPS:** Double contact bayonet base.

**VOLTS:** 6, 12, 24, 32/36 or 120  
Maximum watts: 18



## ELF622, 622D



**DESCRIPTION:** Single, double or triple PAR 36 indoor lighting heads, with fully adjustable swivel to 358°. All aluminum construction.

**FINISH:** Satin aluminum

**MOUNTING:** Standard with round aluminum plate for mounting directly to 4" outlet box (4-gang plate for ELF622D optional).

**LAMPS:** Double contact bayonet base or wedge base incandescent

**VOLTS:** 6, 12, 24, 32/36 or 120  
Maximum watts: 25 (6 watts for 120v)



Supplied complete with lamps as specified in model number. For alternate lamp selection, see lamp chart on pages 62-63.



### ELF644, 644-FR



**DESCRIPTION:** Remote SQUARE-LITE to match SQ Series shown on page 7. Constructed from high impact, mar-resistant thermoplastic with plated steel reflector and prismatic acrylic lens.

**MOUNTING:** Available for surface, semi-recessed (order SQR kit), or fully recessed (order FSQR kit) mounting. Fully recesses into T-bar or exposed Z-spline ceilings. Supporting bars or rods supplied by others.

**FINISH:** Back box: Black satin Front case: Mist white

**LAMPS:** Bi-pin Halogen Lamp

**VOLTS:** 6 or 12 volt



### ELF645, 645D



**DESCRIPTION:** Single, double or triple lighting head with fully adjustable swivel; all thermoplastic construction.

**FINISH:** Mist White, Gray, Black, White.

**MOUNTING:** Standard with round plate for mounting directly to 4" outlet box. (4-gang plate for ELF645D optional).

**LAMPS:** Double contact bayonet base wedge base incandescent

**VOLTS:** 6, 12, 24, 32/36 or 120  
Maximum watts: 25 watts per head



### ELF647, 647D



**DESCRIPTION:** NEMA CLASSIFIED

single, double or triple lighting head with fully adjustable swivel, all thermoplastic construction, and stainless steel screws. Fixtures are rain and dust-tight as well as corrosion resistant.

**FINISH:** Mist White, Gray, Black or White

**MOUNTING:** Standard with round plate for mounting directly to 4" outlet box.

**LAMPS:** Par 36 sealed incandescent

**VOLTS:** 6 or 12 volt  
Maximum watts: 25



### ELF648, 648D




**DESCRIPTION:** Single or double miniature cylinder with satin aluminum housing and mounting plate and fully adjustable chrome swivel. Mirror finished reflector with prismatic lens assures a wide-beam with even light distribution.

**FINISH:** White only

**LAMPS:** Wedge base incandescent

**VOLTS:** 6 or 12 volt  
Maximum watts: 12 watts per head

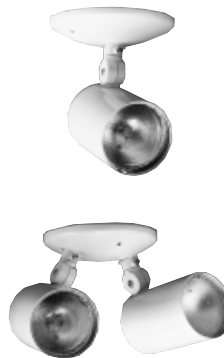

## CONSULT FACTORY

**FOR AVAILABILITY OF HALOGEN, BI-PIN HALOGEN AND SEALED BEAM HALOGEN LAMPS.**

## ordering Information:

Lamp type(s), voltage and maximum wattage available for fixtures are shown under lamp description. Determine lamp type, voltage and wattage required for your application, then select lamp from lamp chart pages 62-63. **Example:** ELF647/4044-M

**Fixture Model**  
Number

**Lamp Suffix**

**Color**

**Voltage**

**Note:** Certain option combinations may effect the UL listing. Please contact the factory for specifics.