



Provides protection against tampering, vandalism and accidental damage.


Constructed of UV stabilized, unbreakable, non-corrosive, clear polycarbonate material.

VRC-4X Models complies with NEMA 4X standards and is supplied with a self-adhesive, closed-cell neoprene gasket which forms a bond around the perimeter of the cover to make the unit dust & water tight. Installs easily to wall or flat surface. Mounting holes are predrilled.

VANDAL RESISTANT COVER

Application: DM3, DM6, DM7, Galaxy, X2 and X3 (wall mount)


Catalog Number:
VRC or VRC-4X (NEMA 4X)

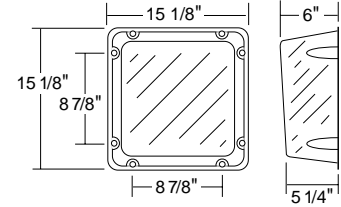

VANDAL RESISTANT COVER

Application: CA-2, DM3, DM6, DM7 (side mounted heads only)


Catalog Number:
CPS or CPS-4X (NEMA 4X)

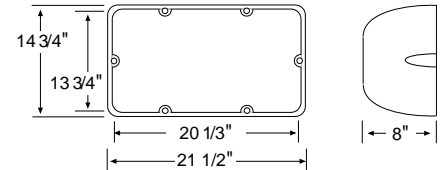

MOUNTING PLATFORMS



- 14 gauge steel
- Corrosion resistant undercoat
- Oven baked hammertone finish
- 1/2" retaining lip on three sides.
- Keyhole slots for easy mounting

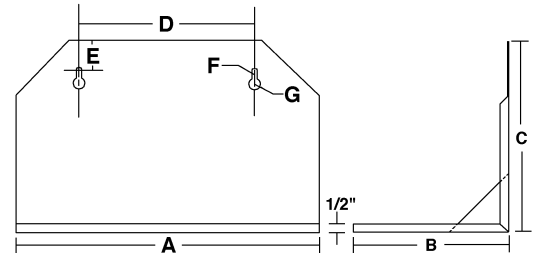


Model	Product	Dimensions						
		A	B	C	D	E	F	G
MP-A	Series SL3, SL9, SL105, SN, S12E, and BL12 Units	17"	7 3/4"	12 1/4"	16"	1 5/8"	5/32"	5/16"
MP-B	Series ABC, A12BC1, and SL13 Units	14 5/8"	6 5/8"	11 1/8"	10 3/8"	1 5/8"	5/32"	5/16"
MP-PQA	Series PQ, P12Q1, P12N Units	16 3/8"	5 3/4"	10 3/16"	12 1/2"	1 5/8"	5/32"	5/16"
MP-PQB	Series P12Q2 Units	17"	7 3/4"	12 1/4"	16"	1 5/8"	5/32"	5/16"
MP-12	Series S12E5, S12E6, S12L, S12N, S24E Units	27 1/2"	7 3/4"	12 1/4"	16"	1 5/8"	5/32"	5/16"
MP-24N	Series S24N	27 1/2"	11 1/2"	12 1/4"	16"	1 5/8"	5/32"	5/16"

MOUNTING BRACKETS



- 16 gauge steel
- Corrosion resistant undercoat
- Oven baked hammertone finish
- Supplied with rubber stand-offs for unit and machine screws to secure unit to bracket.

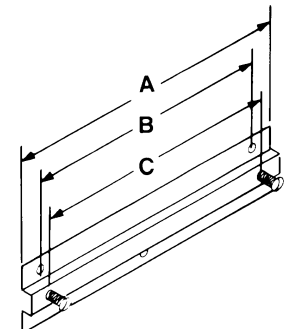

Model	Product	Dimensions		
		A	B	C
MB-A	Series SL3, SL9, SL105, SN, BL12, and S12E Units	14 1/2"	13 3/4"	12 7/8"