

# THE QUICKIE II SERIES



Introducing our new family of products  
**Thermoplastic LED exit**  
 with programmable  
 lighting heads.

**Damp location listing is standard in all models.**

## features

### Housing

- Injection-molded UV stabilized thermoplastic housing, face plates, and canopy
- UL 94V-0 flame rating
- Innovative, snap-together design allows for fast installation
- Replaceable directional chevron inserts are easily removed and reinserted
- Two faces, backplate, and canopy
- Two fully adjustable glare-free SQ light heads for egress light

### Mounting

- Wall or ceiling mounting
- Canopy snaps to housing with a twist-lock feature tightly securing the canopy to the housing

## electrical features.

### Electrical

- 120/277VAC dual voltage operation
- Low power consumption - LED's
- LED indicator light and push button test switch
- Remote capacity - may power additional remote heads (up to 6V 12W) with additional battery
- Low voltage battery disconnect
- All models are damp location listed


### Lamps

- LED's mounted on print circuit board (for exit sign)
- LED lamps are operated in normal (AC input) and emergency (DC input) modes.
- 2 x 6V 5.4 watts DC T5 wedge base lamps for emergency mode


### Battery

- Sealed maintenance-free lead-calcium battery
- Additional battery available for 12 watts remote load or extended unit run time (see how to order).

## dimensions

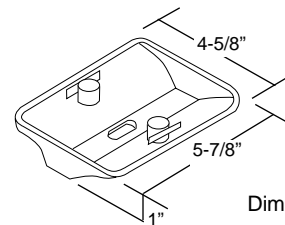

Dimensions are approximate and subject to change.

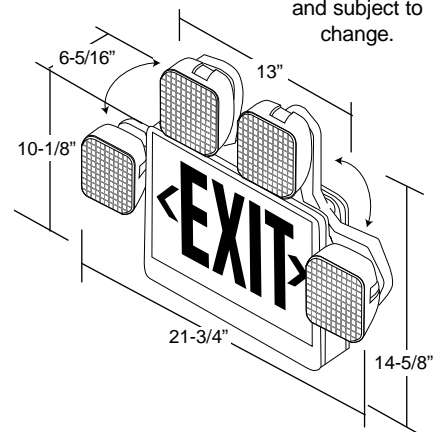

## ordering information

Specify the model number per the following sequence: **Example: UXQLXN500R2SQR**



**UQLXN500**

Series  
Self-powered



**R**

Legend color

**R** = Red  
**G** = Green



**2SQ**

Combo unit

**SQ** = 6V 5.4W heads



**R**

Capacity Indicator

**Blank** = No remote capacity  
**R** = 12 watts remote capacity

## accessories

(order as a separate item)

Suffix

Wireguard (heads in any position) . **WG10**

Replacement battery . . . . . **860.0004**

Replacement lamp (standard) . . **570.0012**

Introducing our new family of products  
**Thermoplastic Emergency Lighting unit with adjustable lighting heads.**

**Damp location listing is standard in all models.**

**Sealed Maintenance Free Batteries**

- Lead calcium



## features

### ■ Housing

- Injection-molded UV stabilized thermoplastic housing and backplate
- UL 94V-0 flame rating
- Innovative, snap-together design allows for fast installation
- Two fully adjustable glare-free SQ light heads for egress light

### ■ Mounting

- Wall or ceiling mounting
- Universal knock-out pattern on the backplate allows for J-box mounting.

## electrical features. dimensions

### ■ Electrical


- 120/277VAC dual voltage operation
- LED indicator light and push button test switch
- Remote capacity - may power additional remote heads (up to 6V 11W).
- Low voltage battery disconnect
- All models are damp location listed

### ■ Lamps

- 2 x 6V 5.4 watts DC T5 wedge base lamps for emergency mode

### ■ Battery

- Sealed maintenance-free lead-calcium battery designed to power 11 watts remote load or extended unit run time.

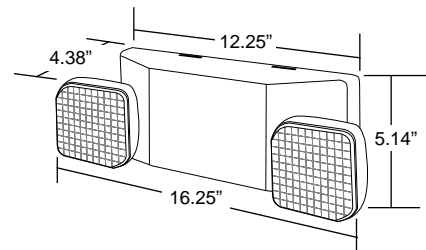

Dimensions are approximate and subject change.


## ordering information

Specify the model number per the following sequence: **Example: LCA2SQR**




**LCA**

*Series  
Self-powered*



**2SQ**

*Light Heads  
2SQ = 6V 5.4W*



**R**

*Capacity Indicator  
R = 11 watts remote capacity\**

\*Do not exceed rated unit capacity.

## accessories

**(order as a separate item)                      Suffix**

Replacement battery .....860.0018

Replacement lamp (standard).....570.0012

Vandal shield.....VRS.BB

Vandal Shield (NEMA 4X) .....VRSBB.4X