

PG, P12G Series

6 or 12 Volt Steel Emergency Unit Sealed Maintenance-Free Lead Calcium Battery UL Listed

The PG, P12G Series battery units combine reliability, versatility, performance and cost-efficiency in an aesthetically pleasing design. Ideally suited for a range of commercial applications.

FEATURES

Reliability

The PG Series has a three-year full warranty (excluding lamps and fuses).

Unit Data

Constructed of rugged steel with a corrosion-resistant undercoating, the PG Series cabinet has a removable front panel providing easy access allowing the unit to be mounted at ceiling height. Standard unit color is "mist-white", but black housing and heads are also optional. All cabinets come standard with 7/8" conduit knockouts, rear keyhole mounting slots and provisions for mounting up to 3 heads on the cabinet.

Lamp

Standard unit furnished with two, Par 36 size, high impact mar-resistant thermoplastic heads with 9-watt high intensity incandescent lamps. Other lighting heads are also available, see options. Tungsten and MR16 halogen lamps optional.

Pulse Type Charger

- Automatic, temperature compensated, pulse type charger.
- High capacity, automatic, dust-tight instantaneous transfer relay.
- Low voltage disconnect prevents over discharge of battery. Automatic brownout protection is provided.
- Labor saving AC line latch prevents battery discharge during installation to a non-energized circuit.
- Fused output circuit.

Controls

- Red charger monitor LED indicates state of charge of the battery.
- Amber AC-ON LED indicates AC power is on.
- Momentary test switch allows for quick operational check of entire system.

Power Requirements

120/277Vac 60Hz, 0.25/0.12 Amp, 30 Watts (Max)

OPTIONS

(Add Suffix to Model No.)	Suffix
Black Housing and Heads (Replace -M with -B)	-B
Ammeter and/or Voltmeter	-A* or -V*
Lamp Disconnect Switch	-DS**
Improved Diagnostics	-ID
Improved Diagnostics, Non-Audible	-IDNA
Time Delay	-TD**
Vandal Resistant Screws	-VR
3-Wire Cord & Plug	-3CP***
3-Wire Cord & Plug (277V)	-3CP-277***
PAR18 Size Lamp Heads	/ELF2
DR1130 Decorative Heads (White)	/DR130

*Not available with diagnostics.

**Not required with ID/IDNA option.

***Standard cord is 3 ft. custom lengths available.


ACCESSORIES

(Order as a separate item)

Wire Guard	WG2
Mounting Platform	MP-PQA



DIMENSIONS

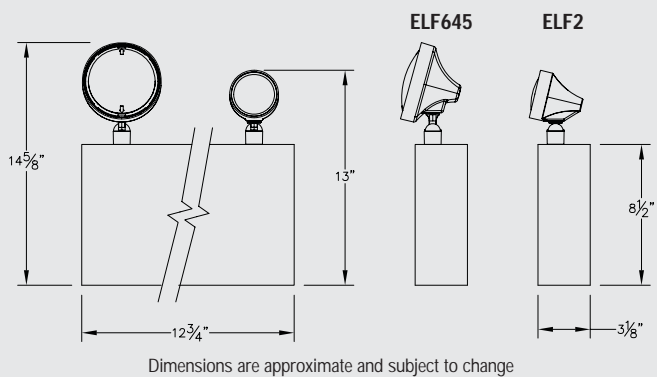

UNIT SELECTION CHART

Each unit furnished with two 9W High Intensity incandescent lamp.

Volts	Model No. (unit/Lamp Suffix)	*Watts to 87-12% of Rated Battery Voltage			
		1-1/2 Hrs.	2 Hrs.	3 Hrs.	4 Hrs.
6	2PG1/L9-M	18	15	-	-
	2PG2/L9-M	54	36	27	18
12	2P12G1/L9-M	54	36	27	18

*National Electrical Code Specification

ORDERING FORMAT

2	PG	1	/L9	-M	-DS
No. of Heads	Series	Capacity Indicator	Lamp Suffix 6V 9W Incandescent	Mist White Finish	Option (Disconnect Switch)