

## Galaxy XLD, XLED Series

### LED Die-Cast Aluminum Exit

#### Universal Mount

#### AC, AC/DC or Self-Powered Exit Signs

#### UL Listed

The Galaxy XLD, XLED Series exit signs save energy while providing excellent visual performance. This series offers universal mounting capabilities as well as long lasting LED performance.

### FEATURES

#### Reliability

The Galaxy "XLD, XLED" Series has a five-year full warranty (less batteries and lamps).

#### Unit Data

The Galaxy "XLD, XLED" series housing is constructed of die-cast Aluminum and features invisible, universal chevron and mounting knockouts. All self-powered models are self contained, all circuitry and batteries are contained inside the exit. All AC-Only signs come wired as AC/DC signs which operate off a remote DC power source when AC power fails. Long-life, high-performance, low power consumption, red LED's of ALINGAP technology, provide an even illumination in normal and emergency modes. A low profile mounting canopy is included with all exit signs for universal top, end or back mount.

#### Choice of Models

**AC-Only Models:** 120 through 277Vac, 50/60Hz universal input. Includes a slimline canopy for top and end mounting.

**AC/DC Models:** 120 through 277Vac, 50/60Hz universal input with a 6 to 24Vdc wire harness. Includes a slimline canopy for top and end mounting.

**Self-Powered Models are Self Contained, batteries and circuitry are located inside the exit housing:** 120 through 277Vac, 50/60Hz universal input. Sealed maintenance free Nickel-Cadmium battery provides 90 minutes of emergency illumination. Includes a slimline canopy for top and end mounting.

### DIAGNOSTIC/SELF-TEST FEATURE (standard)

Diagnostic / Self Test circuitry is standard on all self-powered models. This circuitry is programmed to ensure the exits readiness and reliability by continuously monitoring every critical function of the unit. If a problem occurs, a single service required indicator illuminates immediately. A detailed diagnostic display is located on the inside of the exit sign, out of sight from the general public. The detailed diagnostic display inside the exit sign will further indicate the nature of the fault. The self test will test the unit for 30 seconds every 30 days, 30 minutes every 60 days and 90 minutes annually.

### OPTIONS

|  |        |
|--|--------|
| (Add Prefix to Model No.)                                    | Prefix |
| Fully Recessed .....   | R      |
| (Add Suffix to Model No.)                                    | Suffix |
| Dual circuit (AC only) .....                                 | -2     |
| Vandal Resistant Screws.....                                 | -VR    |
| Lexan Face Shield with Vandal Resistant Screws.....          | -LVR   |
| Fire Alarm Activated Flasher (Self-powered signs only) ..... | -FAF   |
| Buzzer and Flasher (Self-powered signs only).....            | -FB    |
| Damp Location .....  | -DL    |
| Open Face / Special Wording .....                            | -Y     |
| Custom Colors and Finishes are available upon request.       |        |


### ACCESSORIES

#### (Order as a separate item)

|   |      |
|---|------|
| Pendant, white.....                               | PW-* |
| Pendant, black.....                               | PB-* |
| * Specify length of pendant (12", 24", 36", etc.) |      |



### DIMENSIONS

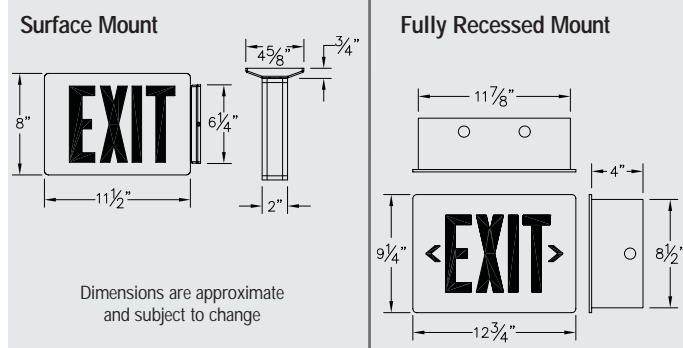

### UNIT SELECTION CHART

| AC ONLY      |        |                  |        |                        |             |                 |
|--------------|--------|------------------|--------|------------------------|-------------|-----------------|
| Series       |        | Housing Colors   |        | Letter/Stencil Colors  |             | Standard Series |
| Description  | Symbol | Description      | Symbol | Description            | Symbol      | Designator      |
| Single Face  | XLD    | Black            | B      | Red/Black              | RB          | N               |
| Double Face  | 2XLD   | White            | W      | Green/Black            | GB          |                 |
|              |        | Brushed Aluminum | A      | Red/White              | RW          |                 |
|              |        |                  |        |                        | Green/White |                 |
|              |        |                  |        | Red/Brushed Aluminum   | RA          |                 |
|              |        |                  |        | Green/Brushed Aluminum | GA          |                 |
| SELF-POWERED |        |                  |        |                        |             |                 |
| Single Face  | XLED   | Black            | B      | Red/Black              | RB          | N               |
| Double Face  | 2XLED  | White            | W      | Green/Black            | GB          |                 |
|              |        | Brushed Aluminum | A      | Red/White              | RW          |                 |
|              |        |                  |        |                        | Green/White |                 |
|              |        |                  |        | Red/Brushed Aluminum   | RA          |                 |
|              |        |                  |        | Green/Brushed Aluminum | GA          |                 |

### POWER CONSUMPTION CHART

| Model        | AC Specs      |      | DC Specs      |                 |
|--------------|---------------|------|---------------|-----------------|
| AC-only      | 120 to 277Vac | 1.4W | -             | -               |
| AC/DC        | 120 to 277Vac | 1.4W | 6 to 24 VDC   | Less than 1.5 W |
| Self-powered | 120 to 277Vac | 1.7W | NiCad battery | Min. 90 minutes |

### ORDERING FORMAT

| 2XLED  | A                                   | R                     | A                                   | -VR                                 | -N*                                      |
|--|-------------------------------------|-----------------------|-------------------------------------|-------------------------------------|--|
| Series<br>(Double Face Self-Powered Exit)  | Housing Color<br>(Brushed Aluminum) | Letter Color<br>(Red) | Stencil Color<br>(Brushed Aluminum) | Option<br>(Vandal Resistant Screws) | Standard Series Designator<br>(see note) |
| * The "-N" Designator features self-powered units with improved diagnostic and AC units with DC-remote input (6-24Vdc) |                                     |                       |                                     |                                     |  |