



Genesis GXEM Floor Proximity Series

Genesis Master with Remote Floor Proximity LED Exit Surface or Recessed Mount Evaluated to UL 924 Standard

The Genesis GXEM Floor Proximity Series are premium die-cast exit signs that combine style with superior performance and durability. This series can be surface or recessed mounted at the floor level and are available as AC-only, AC-dual circuit and as a DC-remote fixture supplied by a "Master" Genesis Exit sign.

FEATURES

Reliability

The Genesis GXEM Floor Proximity Series has a five-year full warranty (less batteries and lamps).

Unit Data

The Genesis "Master" units are constructed of die-cast aluminum. The Floor proximity remote units' housing and stencil face, finished in white or black, are constructed of rugged steel. When the floor proximity remote unit is ordered with a brushed aluminum finish, the stencil face is aluminum. The Floor proximity remote sign is available in slim line surface mount or recessed. All connecting hardware is included. The tamper proof screws and clear, high impact polycarbonate shield make sign vandal resistant. The LED's are very reliable, provide even illumination and low maintenance costs. The Red LED's are of ALINGAP technology and draw less than one watt.

The remote floor proximity exit signs are wired to a single face Genesis LED "Master" exit, which is mounted above the door. The remote floor proximity unit can be mounted up to 10 feet away from the Master sign. **This "Master" sign will power and control both signs in AC and emergency mode (both signs are 120/277 volt for master/floor proximity operation).**

Circuitry

Fully integrated circuitry includes a 2-wire 120-277Vac AC voltage input regulator, as well as an automatic, constant-current battery charger with solid-state transfer and AC-LED monitor and test switch.

Power Requirements

120/277Vac

DIAGNOSTIC/SELF-TEST FEATURE (standard)

The self-test/diagnostic feature continuously monitors the charger assembly, battery and LED assembly current. If a fault is indicated, the external service required indicator will illuminate. The internal fault indicators will then indicate the nature of the fault. The self-test/diagnostic will self test for 30 seconds every 30 days, 30 minutes every 60 days and 90 minutes annually. Meets NFPA 101 Life Safety Code requirements for periodic testing (Self-Powered Master Exit only).

OPTIONS

(Add Suffix to Model No.)

Vandal Resistant.....-VR


Custom colors and finishes are available upon request.

POWER CONSUMPTION CHART

	Models	AC Specs		DC Specs	
RED	AC-only	120/277Vac	1.2W	-	-
	AC-2 Circuit	120/277 and 277/277Vac	2.6W	-	-
	Self-Powered	120/277Vac	3.8W	NiCad battery	Min. 90 minutes
GREEN	AC-only	120/277Vac	0.9W	-	-
	AC-2 Circuit	120/277 and 277/277Vac	3.3W	-	-
	Self-Powered	120/277Vac	5W	NiCad battery	Min. 90 minutes

HOW TO ORDER TYPICAL APPLICATIONS

SELF-POWERED MASTER WITH FLOOR-PROXIMITY UNIT

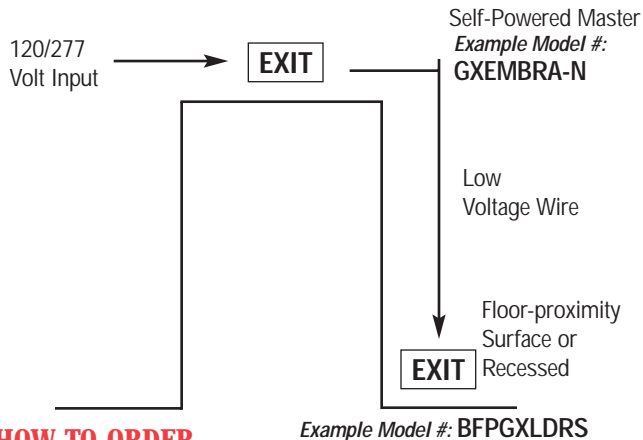

HOW TO ORDER


SELF-POWERED MASTER (Unit for above door)

GXEM	B	R	A	-N
Series	Housing Color	Letter Color	Door Color	Standard Series Designator
	B= Black W= White A= Brushed Aluminum	R= Red G= Green	B= Black W= White A= Brushed Aluminum	

FLOOR PROXIMITY UNIT (Unit on side of door)

B	FPGXLD	R	S	-VR
Housing Color	Series	Letter Color	Mounting	Options
B= Black W= White A= Brushed Aluminum		R= Red G= Green	R= Recessed S= Surface	

AC-ONLY MASTER WITH FLOOR-PROXIMITY UNIT 2 CIRCUIT APPLICATION

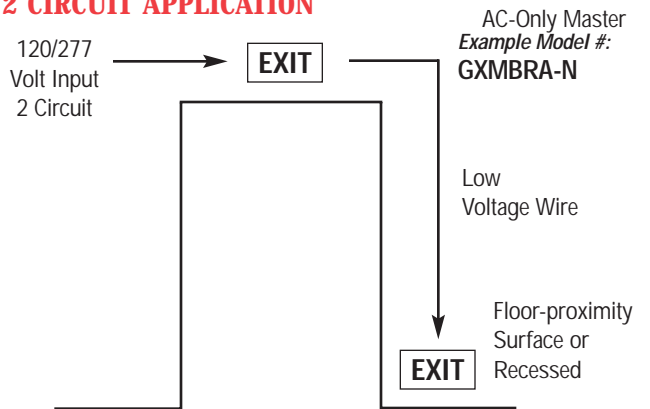

HOW TO ORDER

AC-ONLY MASTER (Unit for above door)


GXM	B	R	A	-N
Series	Housing Color	Letter Color	Door Color	Standard Series Designator
	B= Black W= White A= Brushed Aluminum	R= Red G= Green	B= Black W= White A= Brushed Aluminum	

FLOOR PROXIMITY UNIT (Unit on side of door)


B	FPGXLD	R	S	-VR
Housing Color	Series	Letter Color	Mounting	Options
B= Black W= White A= Brushed Aluminum		R= Red G= Green	R= Recessed S= Surface	

DIMENSIONS

Self-Powered/AC-Only Master
GXEMBRA-N
GXMBRA-N



Floor Proximity Slave Surface Mount
FP-GXLDGS
FP-GXLDRS

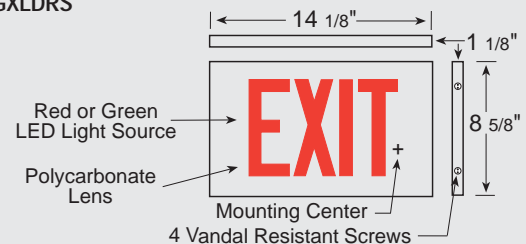

For Self-Powered Low Proximity Surface Mount, see Genesis "GX" Series on page 54, with VR option.

For Self-Powered Low Proximity Recessed Mount, see Galaxy "XL, XLED" Series on page 56, with VR option.

Dimensions are approximate and subject to change

Floor Proximity Slave Recessed Mount
FP-GXLDGR
FP-GXLDRR

