

## Surface Mounted Remote Series



UL

ELF2, ELF2D

Wattage doubles for "D" 2-lamp version

### ELF2, ELF2D

**DESCRIPTION:** Single or double PAR18 size indoor lighting head with fully adjustable swivel; all thermoplastic construction.

**FINISH:** Mist White (-M), Black (-B)

**MOUNTING:** Surface (wall or ceiling) direct 4" octagonal or single-gang box

**DIMENSIONS:** 5" diameter base, 5-9/16" height (single head)

**LAMPS:** Wedge base incandescent • Bi-pin halogen

**VOLTS:** 6, 12 or 24 volt

**MAXIMUM WATTS:** 18 watts

Remote Fixture Model #	Lamp Suffix	Color	Voltage
ELF2	/	_____	_____



UL

ELF3, ELF3D

Wattage doubles for "D" 2-lamp version

### ELF3, ELF3D

**DESCRIPTION:** Single or double MR16 size indoor lighting heads with fully adjustable swivel. All thermoplastic construction.

**FINISH:** Mist White (-M), Black (-B)

**MOUNTING:** Direct to 4" octagonal electrical box

**DIMENSIONS:** 5" diameter base, 5-1/8" height (single head)

**LAMPS:** MR16

**VOLTS:** 6 or 12 volt

**MAXIMUM WATTS:** 20 watts

Remote Fixture Model #	Lamp Suffix	Color	Voltage
ELF3	/	_____	_____



UL Listed

ELF603

### ELF603

**DESCRIPTION:** Rectangular fixture with diffusing lens. Welded steel housing.

**FINISH:** White baked enamel

**MOUNTING:** Surface (wall or ceiling). Knockouts provided on 2 sides and back.

**DIMENSIONS:** 8-1/4" X 4-1/2" X 3" deep

**LAMPS:** Double contact bayonet base

**VOLTS:** 6, 12, 24 or 120 volt

**MAXIMUM WATTS:** 18 watts

Remote Fixture Model #	Lamp Suffix	Voltage
ELF603	/	_____ - _____



UL Listed

ELF606

### ELF606

**DESCRIPTION:** Round, surface mounted gimbal fixture with welded steel housing. Lamp has a horizontal rotation of 358° and vertical angle adjustable to 42°.

**FINISH:** Mist white

**TRIM:** White

**MOUNTING:** Surface (wall or ceiling). 1/2" or 3/4" knockout provided.

**DIMENSIONS:** 8-1/2" X 3-1/2" deep

**LAMPS:** Sealed beam incandescent • Double contact bayonet base • Wedge-base incandescent • Bi-pin halogen.

**VOLTS:** 6 or 12 volt

**MAXIMUM WATTS:** 25 watts per head

Remote Fixture Model #	Lamp Suffix	Voltage
ELF606	/	_____ - _____



UL

ELF622, ELF622D

Wattage doubles for "D" 2-lamp version

### ELF622, ELF622D

**DESCRIPTION:** Single or double PAR36 size indoor lighting heads with fully adjustable swivel to 358°. All aluminum construction.

**FINISH:** Satin Aluminum (Blank), Mist White (-M), Black (-B) or Chrome (-CH)

**MOUNTING:** Direct to 4" octagonal electrical box.

**DIMENSIONS:** Single head: 5-1/8" diameter base, 8-1/2" height.

Double head: 5" diameter base, 6-1/2" height.

ELF622: Mounting plate 2-1/2" X 4-1/4"

ELF622D: Mounting plate 6-7/16" X 4-1/2"

**LAMPS:** Double contact bayonet base • Wedge base incandescent • Bi-pin halogen • PAR36 sealed beam.

**VOLTS:** 6, 12, 24, 36 or 120 volt

**MAXIMUM WATTS:** 25 (10 watts for 120V)

Remote Fixture Model #	Lamp Suffix	Color	Voltage
ELF622	/	_____	_____



ELF623, ELF623D

Wattage doubles for "D" 2-lamp version

**ELF623, ELF623D**

**DESCRIPTION:** Single adjustable decorative lighting head - all thermoplastic construction.

**FINISH:** Mist White (-M), Black (-B)

**MOUNTING:** Direct to 4" octagonal or single-gang box round mounting canopy standard.

**LAMPS:** Wedge base incandescent • Bi-pin halogen

**VOLTS:** 6 or 12 volt

**MAXIMUM WATTS:** 18 watts per head

Remote Fixture Model #	Lamp Suffix	Color	Voltage
ELF623	/ _____	_____	_____



ELF644

Wattage doubles for "D" 2-lamp version

**ELF644**

**DESCRIPTION:** Remote SQ SQUARE-LITE to match SQ, SQ-D Series shown on page 18. Constructed from high impact, mar-resistant thermoplastic with plated steel reflector and prismatic acrylic lens.

**FINISH:** Back box: Black satin; Front case: White

**MOUNTING:** Available for surface, semi-recessed (order SQR kit), or fully recessed (order FSQR kit) mounting. Fully recesses into T-bar or exposed Z-spline ceilings. Supporting bars or rods supplied by others.

**DIMENSIONS:** 9" X 9" X 4" deep

**LAMPS:** Bi-pin halogen • Double contact bayonet base • Wedge base incandescent

**VOLTS:** 6 or 12 volt

**MAXIMUM WATTS:** 14 watts per lamp

Remote Fixture Model #	Lamp Suffix	Voltage
ELF644	/ _____	_____



ELF645, ELF645D, ELF645T

Wattage doubles for "D" 2-lamp version

**ELF645, ELF645D, ELF645T**

**DESCRIPTION:** Single, double or triple PAR36 size lighting head with fully adjustable swivel, all thermoplastic construction.

**FINISH:** Mist White (-M), Gray (-G) or Black (-B)


**MOUNTING:** Standard with round plate for mounting directly to 4" outlet box (4-gang plate for ELF645D optional).

**LAMPS:** Double contact bayonet base • Wedge base incandescent • Bi-pin halogen • PAR36 sealed beam.

**VOLTS:** 6, 12, 24, 36 or 120 volt

**MAXIMUM WATTS:** 25 watts per head

Remote Fixture Model #	Lamp Suffix	Color	Voltage
ELF645	/ _____	_____	_____

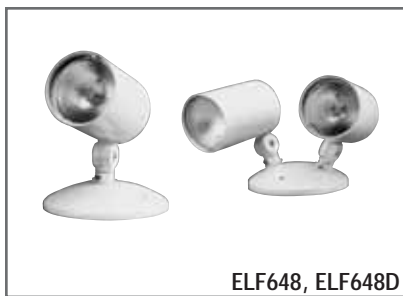

ELF648, ELF648D

Wattage doubles for "D" 2-lamp version

**ELF648, ELF648D**

**DESCRIPTION:** Single or double miniature cylinder with satin aluminum housing and mouting plate and fully adjustable chrome swivel. Mirror finished reflector with prismatic lens assures a wide-beam with even light distribution.

**FINISH:** White (-M), Black (-B)

**MOUNTING:** Direct to 4" octagonal electrical box

**LAMPS:** Bi-Pin halogen

**VOLTS:** 6 or 12 volt

**MAXIMUM WATTS:** 12 watts per head

Remote Fixture Model #	Lamp Suffix	Color	Voltage
ELF648	/ _____	_____	_____