

Galaxy™ XDPC Series

Die-cast aluminum remote capacity exit sign



Construction

- Die-cast aluminum housing
- Panel features a curved contour for maximum illumination and clarity
- 6 inch EXIT lettering legend available in red or green
- Field-selectable chevrons
- Choice of finishes: white, black or brushed aluminum

Mounting

- Surface mount
- Canopy included for end or ceiling mount applications
- Universal J-Box mounting

Electronics

- Optional **Improved Diagnostics**
- 120/277 60Hz

Battery type

- XDPCCL model, (lead-calcium battery) 6V-9W remote load capacity

Special Wording Panels

- Available. Contact your sales representative with your design requirements

Approvals

- UL 924 listed
- Damp location optional 50°F to 104°F (10°C to 40°C)
- Meets NFPA101 (Life Safety Code), NFPA 70 NEC, OSHA illumination standards

Warranty (subject to proper installation and maintenance)

Five year limited warranty

Detailed warranty terms located on **page 197** or online at: www.lightalarms.com




Face plate color



Brushed aluminum




Black



White

Dimensions (Dimensions are approximate and subject to change):

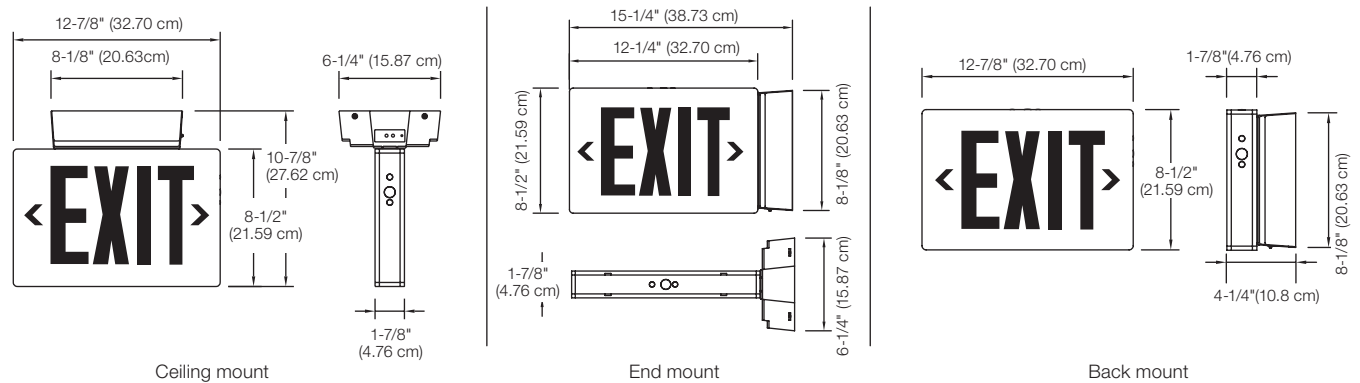

Power consumption chart

Series	AC specs				DC specs			
	AC input	Maximum	Voltage	Battery	Battery capacity in watts			
					1-1/2 hrs.	2 hrs.	3 hrs.	4 hrs.
XDPCL	120/277VAC, 60Hz	0.13/0.06A (15W)	6V	Lead-calcium	9	-	-	-

Accessories (Order as a separate item)

Product code	Description
WG13-L	Wire guard, back mount
WG14-L	Wire guard, ceiling mount

Ordering format

No. of faces	Series	Battery	Back plate/ frame color	Legend/ face plate color	Options
1= Single face 2= Double face	XDPC = LED exit	Lead-calcium L = 6V-9W remote capacity	B = Black W = White A = Brushed aluminum	RB = Red/black GB = Green/black RW = Red/white GW = Green/white RA = Red/Brushed aluminum GA = Green/brushed aluminum	Blank = No options -ID = Improved Diagnostics (audible) -IDNA = Improved Diagnostics (non-audible) -Y = Open faceplate and special wording faceplate

Example: 2XDPCLBRAIDNA