

UX4 LED Steel Exit and Combination Series

Steel LED exit signs and combination units



Construction

- Steel housing
- Standard mist-white finish, optional black finish
- Heads available in thermoplastic
- 6 inch EXIT lettering legend, available in red or green
- Field-selectable chevrons

Mounting

- Surface mount
- Canopy included for end or ceiling mount applications
- Universal J-Box mounting

Combo units

- UX4E Model, Lead-calcium battery, 6V-30W total battery capacity
- UX4EN Model, Nickel-Cadmium battery, 6V-24W total battery capacity

Exit sign

- UX4 Model, Exit Sign, AC-Only, 120/277VAC, 50/60Hz
- UX4N Model, Nickel-Cadmium battery

Photometric performance

Lamp	Spacing center-to-center (feet)	
	7 feet mounting height	15 feet mounting height
LD1	43'	36'
LD2	81'	64'

Unit Rating Chart (Combination unit)

Battery type	DC Voltage (Volts)	Model	Battery capacity in watts			
			1-1/2 hrs.	2 hrs.	3 hrs.	4 hrs.
Lead-calcium	6	UX4E	30	20	14	10
Nickel-Cadmium	6	UX4EN	24	18	12	9

Lamp Head Source

- MR16 LED 6V 4W or 6V 5W

Electronics

- Improved Diagnostics
- Optional Nexus® monitoring system
- 120/277 60Hz

Special Wordings Panels

Available. Contact your sales representative with your design requirements


Approvals

- UL 924 listed
- Meets NFPA101 (Life Safety Code), NFPA 70-NEC and OSHA illumination standards
- E-California Energy Commission Title 20 (Exit sign only)

Warranty (subject to proper installation and maintenance)

Three-year limited warranty

Detailed warranty terms located on page 197 or online at: www.lightalarms.com

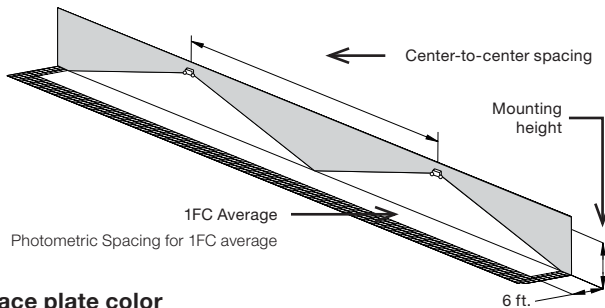


Face plate color



Brushed aluminum Black White

Dimensions (Dimensions are approximate and subject to change):

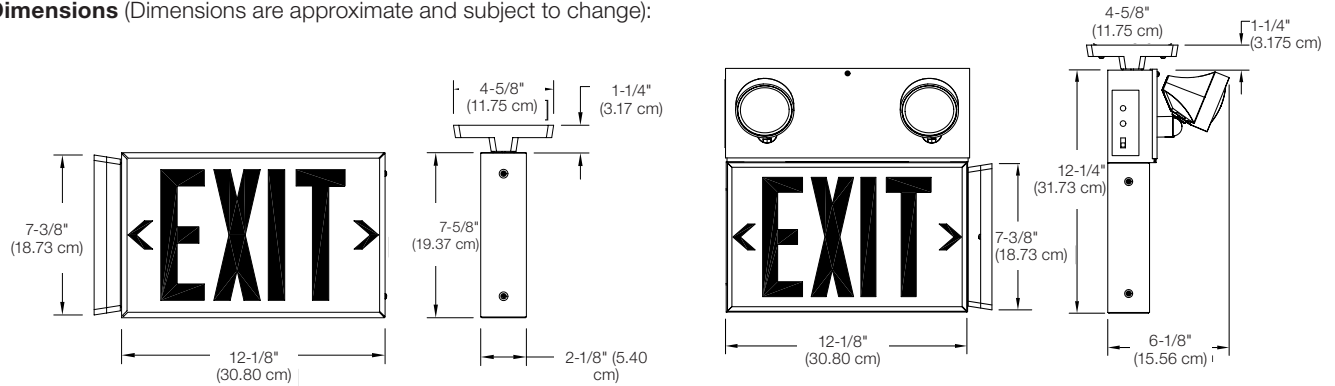

Power consumption chart

Model	AC Specs	DC Specs
AC-Only	120-277VAC, 50/60Hz (Less than 1.5W)	-
AC/DC	120-277VAC, 50/60Hz (Less than 1.5W)	6 to 24VDC (Less than 1.5W)
Self-powered	120-277VAC, 50/60Hz (Less than 3W)	Nd-Cd battery (Min. 90 minutes)
Combination	120-277VAC, 50/60Hz (Less than 5W)	See unit rating chart

Accessories (Order as a separate item)

Description	Product code
White pendant	PW-*
Black pendant	PB-*
Wire guard (exit-ceiling or end mount)	WG5-L
Wire guard (exit-wall mount)	WG12-L
Wire guard (combination unit-wall mount)	WG6-L

*Specify pendant length (12", 24", 36" etc.)

Ordering format – AC-only and Self-powered Models

Series	Battery type	Back plate/ Frame color	Legend/ Face Plate Color	Legend source	Options
UX4 = Universal (2) faceplates, (1) backplate and (1) canopy	Blank = AC-only N = Self-powered	W = White B = Black	RW = Red/White RB = Red/Black RA = Red/Aluminum GW = Green/White GB = Green/Black GA = Green/Aluminum	LED = LED	Blank = No options -ID = Improved Diagnostics -NEXRF = Nexus® wireless ¹ (consult your sales representative) -DC = AC/DC 6V-24VDC -VR = Vandal resistant screws & lens

Example: UX4WRWLED

¹ Available in self-powered only

Ordering format – UX4 LED Steel Exit & Combination units

Series	Unit type	Back plate/ Frame color	Legend/ Face plate color	Legend source	Lamp head suffix	Lamp options	Options
UX4 = Universal (2) faceplates, (1) backplate and (1) canopy	E = 6V-30W lead-calcium battery EN = 6V-24W Nickel-Cadmium battery	W = White B = Black	RW = Red/White RB = Red/Black RA = Red/Aluminum GW = Green/White GB = Green/Black GA = Green/Aluminum	LED = LED	/0 = No heads /1ELF3 = (1) ELF3 head /2ELF3 = (2) ELF3 heads	LD1 = 6V-4W MR16 LED LD2 = 6V-5W MR16 LED	Blank = No options -ID = Improved Diagnostics (audible) ¹ -IDNA = Improved Diagnostics (non-audible) ¹ -NEXRF = Nexus® wireless ¹ - combo unit only (consult your sales representative) -T3 = Time Delay 15 minutes -VR = Vandal resistant screws

Example: UX4EWRWLED/2ELFLD1

¹ Not available with EN model