

ELF640 Series

ELF640 vandal resistant



Description

- ELF640 & ELF640P vandal resistant for indoor use with choice of cast aluminum or plastic back plate
- Include clear polycarbonate UV impact resistant cover

Lamp type

Choice of MR16 LED lamp voltages and wattages

Mounting

- Surface Mount
- Universal J-Box mounting

Approvals

- UL 924 Listed
- Vandal Resistant


Warranty (subject to proper installation and maintenance)

Unit: five-year full warranty

Detailed warranty terms located on [page 197](#) or online at: www.lightalarms.com




Dimensions (Dimensions are approximate and subject to change)

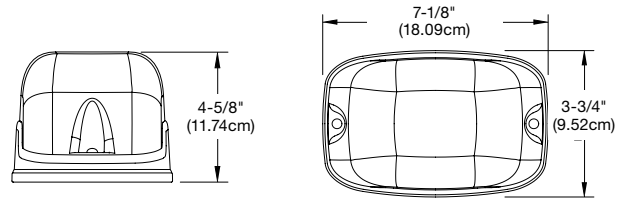

Photometric performance

Lamp	Spacing center-to-center (feet)	
	7 feet mounting height	15 feet mounting height
LD1	39'	34'
LD2	74'	57'
LD7	49'	39'
LD9	68'	54'
LD10	89'	80'
LD13	51'	39'
LD25	43'	39'

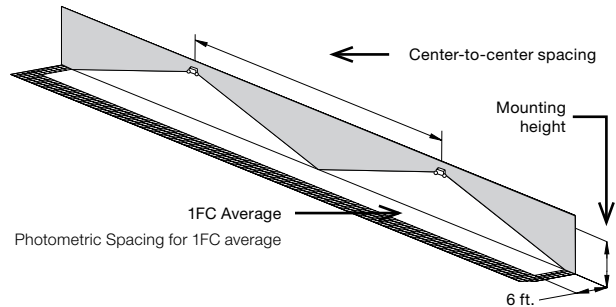

Lamp selection chart

Lamp suffix	Voltage	Wattage	Lumens	MR 16 LED lamps	
				Replacement #	
LD1	6	4	130	580.0097-L	
LD2	6	5	415	580.0122-L	
LD7	12	4	170	580.0093-L	
LD9	12	5	340	580.0104-L	
LD10	12	6	510	580.0106-L	
LD13	24	4	200	580.0098-L	
LD25	120	4	204	580.0095-L	

Ordering format

Series	Lamp suffix	Color	Voltage	Options
ELF640P= All polycarbonate single head for dry location	/_____ ¹	-M= White	6= 6 VDC	Blank= no option
ELF640PD= All polycarbonate double head for dry location		-B= Black	12= 12 VDC	T= tamper proof screws
ELF640= Die-Cast back plate single head for dry location		-G= Gray	24= 24 VDC	
ELF640D= Die-Cast back plate double head for dry location			120= 24 VDC/VAC	

Example: ELF640D/LD7-M12

¹Choose from lamp selection chart