

Infinite Series

Low profile LED emergency lighting



Housing

- Indoor/outdoor suitable for wet location
- Die-cast aluminum housing
- UV-resistant (3" x 1.5") polycarbonate lens
- Photocell standard

Mounting

- Wall or ceiling mount
- 1/2" rigid conduit top entry
- Universal J-box mounting

Lamp type

- 1600 lumens in AC mode 600 Lumens in emergency mode
- Color temperature: 5000K
- Dual-mode operation: normal and emergency LED lighting with separate AC inputs

Electronics

- Pulse plus charger
- Low voltage disconnect
- Automatic brownout protection
- Battery lock-out
- Fused output circuit
- 120/277 60Hz
- AC unit rated for -13°F to 122°F (-25°C to 50°C)
- Dual mode unit rated for 5°F to 122°F (-15°C to 50°C)

Photometric performance

Spacing center-to-center (feet)	
Mounting height	Distance
7.5'	50'
10'	63'


Approvals

- UL 924 Listed
- NEMA-3R Rated for indoor/outdoors cold-weather wet and damp locations
- Meets all NFPA 70, NFPA 101 life safety codes


Warranty (subject to proper installation and maintenance)

Unit: three-year full warranty

Detailed warranty terms located on **page 182 of the catalog** or online at: www.lightalarms.com

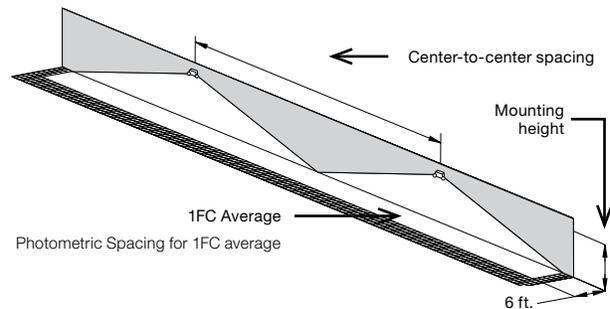

Dimensions (Dimensions are approximate and subject to change)

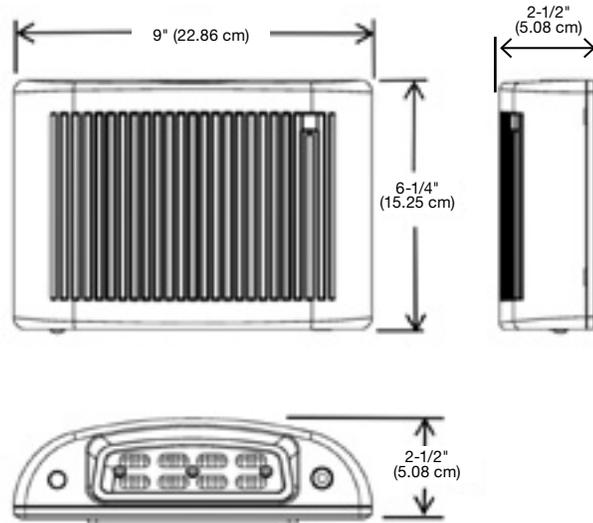

Power consumption chart

Series	DC Specs		AC Specs
	Battery	Voltage	Units dual voltage
AC	-	-	120/277
ACSD	Nickel-Cadmium	7.2V	

Ordering format

Series	Head style / Lamp type	Color	Options
INF= Infinite	AC= AC only ACSD= Dual-mode	DB= Dark bronze	-CW= Cold weather ¹

Example: INFACSDDB

¹ Available on the ACSD