

## ■ SL Series

### 6 Volt Emergency Unit with Remote Capability Long Life Wet Refillable Lead-Acid Battery UL Listed

The **SL Series** battery unit is offered where a reliable, long-life, low-maintenance wet battery unit is required. This series was designed for remote capability and offers a selection of battery capacities.

### ▣ FEATURES

#### Reliability

The **SL Series** has a three-year full warranty (excluding lamps and fuses).

#### Unit Data

Battery and all components are housed in a heavy-duty steel cabinet, with a removable front panel for ease of installation and servicing. The front panel includes a view port for visual inspection of the battery, which is encased in a clean, smooth container of transparent high impact material. The standard cabinet finish will be gray enamel, but "mist-white" is also available (see options). All cabinets come standard with 7/8" conduit knockouts, rear keyhole mounting slots and provisions for mounting up to 3 heads on the cabinet.

#### Lamp

Standard SL Series units are furnished with two, Par 36 size, high impact mar-resistant thermoplastic heads with 25-watt high intensity incandescent lamps. The heads are fully adjustable horizontally and vertically. Optional lamps are available.

#### Pulse Type Charger

- Automatic, temperature compensated, pulse type charger.
- High capacity, automatic, dust-tight instantaneous transfer relay.
- Low voltage disconnect prevents over discharge of battery. Automatic brownout protection is provided.
- Labor saving AC line latch prevents battery discharge during installation to a non-energized circuit.
- Fused output circuit.

#### Controls

- Red charger monitor LED indicates state of charge of the battery.
- Amber AC-ON LED indicates AC power is on.
- Momentary test switch allows for quick operational check of entire system.

#### Power Requirements

120/277Vac 60Hz, 0.30/0.15 Amp

### ▣ OPTIONS

#### (Add Suffix to Model No.)

	Suffix
Voltmeter (Not available with diagnostics) .....	-V
Ammeter (Not available with diagnostics) .....	-A
Lamp Disconnect Switch .....	-DS**
Time Delay (12 minutes) .....	-TD**
Improved Diagnostics .....	-ID**
Improved Diagnostics, Non-Audible .....	-IDNA**
3-Wire Cord & Plug .....	-3CP***
3-Wire Cord & Plug (277V) .....	-3CP-277***
Mist White Color (Replace -G with -M) .....	-M

\*2SL3 only

\*\*Not required with ID/IDNA option.

\*\*\*Standard cord is 3 ft. custom lengths available.

### ▣ ACCESSORIES


#### (Order as a separate item)

	Suffix
Mounting Platform .....	MP-A
Mounting Bracket .....	MB-A
Wire Guard .....	WG3-L



### ▣ DIMENSIONS

Dimensions are approximate and subject to change.

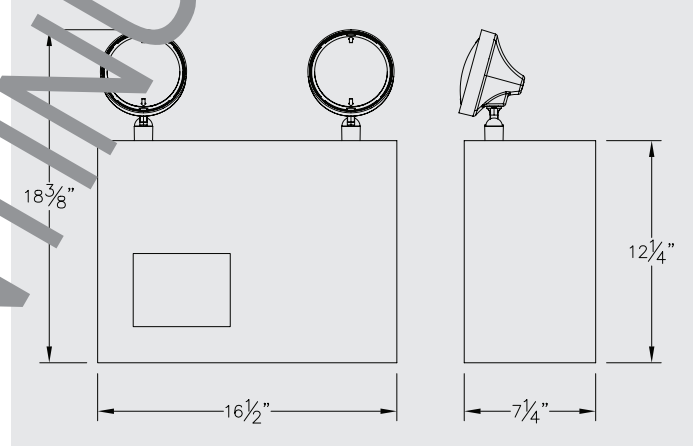

### ▣ UNIT SELECTION CHART

Volts	Model No. (Unit/Lamp Suffix)	Watts to 87.5% of rated battery voltage*			
		1 1/2 hrs.	2 hrs.	3 hrs.	4 hrs.
6	2SL3/L25-G	100	80	50	40
	2SL9/L25-G	200	150	125	100
	2SL105/L25-G	200	200	175	125

\*National Electrical Code Specification

### ▣ ORDERING FORMAT

2	SL	9	/25	-G	-V
No. of Heads	Series	Capacity Indicator	Lamp Suffix	Finish	Option
			6V 25W Incandescent	Gray Enamel	Voltmeter