


■ X3 Series



▣ DIMENSIONS

Dimensions are approximate and subject to change.

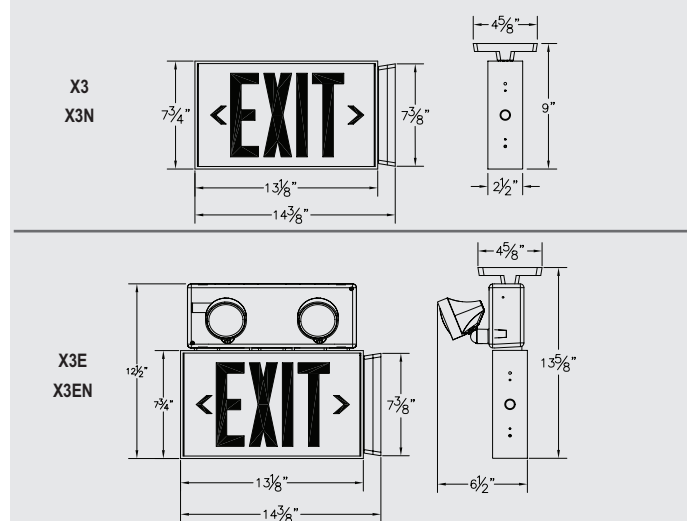

▣ UNIT SELECTION CHART

Total DC power available for local and remote emergency lights.

Battery Type	DC Voltage	Model No.	Watts to 87.5% of rated battery voltage*			
			1 1/2 hrs.	2 hrs.	3 hrs.	4 hrs.
Lead-Calcium	6	UX3E	30	20	15	10
Nickel-Cadmium		UX3EN	24	18	12	9

*National Electrical Code Specification

▣ POWER CONSUMPTION CHART

Model	AC Specs		DC Specs	
AC-only	120 to 277Vac	Less than 2.5W	-	-
AC/DC	120 to 277Vac	Less than 1.5W	6 to 24Vdc	Less than 1.5W
Self-powered	120 to 277Vac	Less than 3W	Nickel-Cadmium	Min. 90 Minutes

▣ ORDERING FORMAT

U	X3	EN	B	R	A	LED	/2M	-FAF
Style	Model	Type	Color	Letter Color	Stencil	Light Source	Combo Unit	Options
U= Universal X3 Series 2 faces & canopy		Blank= AC Only E= Self-Powered Lead Calcium with Power Pack EN= Self-Powered NiCAD, with Power Pack N= Self-Powered (self-contained NiCad) (Exit Only)	W= White B= Black	R= Red G= Green	W= White B= Black A= Aluminum	LED= LED	/0= 0 heads power use for remote fixtures /1L= 1 Large head /1M= 1 Mini head /2L= 2 Large heads /2M= 2 Mini heads	-FB= Flasher/Buzzer

Extruded Aluminum LED Exits and Combination Units

Sealed Maintenance-free Lead Calcium or

Nickel-Cadmium Battery

UL Listed

AC-Only exit signs are UL listed for use in Damp Locations

The X3 Series exit signs and power packs combine versatility, energy efficiency and performance in a moderately-priced package.

▣ FEATURES

Reliability

The X3 Series has a three-year full warranty (excluding lamps and fuses).

Unit Data

The X3 Series housing is constructed of extruded aluminum and features universal chevrons and a bottom aperture that provides a down-light effect. Universal exit signs are supplied with canopy kit, extra stencil and diffuser set to permit any mounting either as single or double face. Long-life, energy-efficient, LED light source reduces maintenance and energy costs.

LED Combination units have additional 13-19 watts remote capacity with (2) 6-watt mounted heads, depending on the model.

Light Source

The unit comes standard with two 6 volt, 6-watt high intensity wedge base incandescent lamps. Other lamp options are available, please refer to Lamp Chart.

Choice of Models

Exit Sign

= AC input: universal 2-wire 120 to 277Vac 50/60Hz

= AC/DC models: universal 2-wire 6 to 24Vdc

= Self-powered models: long-life, sealed Nickel-Cadmium battery

Combination Units

Remote capacity –Lead Calcium Battery (E)

No heads = 26 Watts remote capacity

Two 6-watt ELF2 mounted heads = 12 Watts remote capacity

Remote capacity – Nickel-Cadmium Battery (EN)

No heads = 20 Watts remote capacity

Two 6-watt ELF2 mounted heads = 8 Watts remote capacity

Power Consumption

120/277 Vac, 60Hz, 0.3/0.15 Amp

▣ OPTIONS

(Add Suffix to Model No.)

Suffix

AC/DC Remote (6-24Vdc)-DC

Flasher/Buzzer (Self-powered signs only)-FB

▣ ACCESSORIES

(Order as a separate item)

277 Volt Conversion Kit-Black.....CTXB-277

277 Volt Conversion Kit-WhiteCTXW-277