



Remote Fixtures

Saf-T-Ray™ SAF Series.....	37
Decorative Remote Series	38, 39
Remote Fixture Series.....	40, 41

Saf-T-Ray™ SAF Series

Decorative Style Wall Mount Remote Fixture
Listed to UL 924 Standards

The Saf-T-Ray™ wall sconce unit was designed and engineered with durability and sophistication in mind. Its low-profile aesthetic design will provide an attractive alternative to the typical two-headed standard emergency lighting fixtures.



APPLICATIONS

The Saf-T-Ray is suitable for outdoor and indoor use, in a wide range of applications where aesthetics cannot be compromised.


LAMPS HEADS

Precise beam control is provided with two fully adjustable MR16 halogen lamps, secured in an attractive molded swivel assembly for maximum light output. Saf-T-Ray will provide an average of one-foot candle along the path of egress. Saf-T-Ray can also be used with the premium option of the high efficiency 3-Watt MR16 white LED lamp. IES photometric data files are available.



DIMENSIONS

Dimensions are approximate and subject to change.

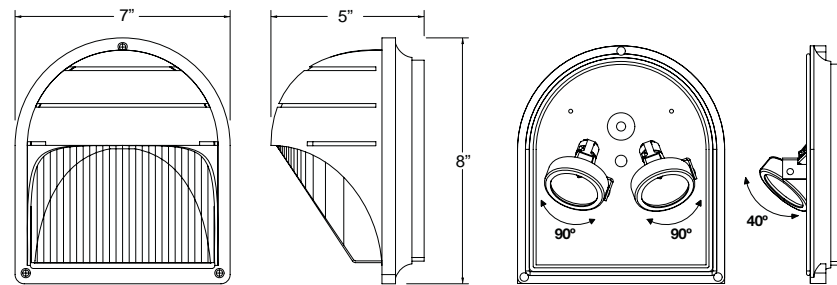

FEATURES

- HOUSING:** The premium die-cast aluminum housing is designed to withstand extreme weather conditions. Ideal for damp, wet and cold location specifications, the unit has a fully gasketed cover with vandal resistant screws available as an option. Available in four (4) textured powder paint finishes: white, black, dark bronze and dark gray. Other colors and finishes available for custom projects.
- DIFFUSER:** Polycarbonate diffuser maximizes light output and completes the wall sconce decorative lines. A robust polycarbonate lens is ideal for applications where impact- and tamper-resistant emergency lighting are specified.



ORDERING INFORMATION

Example: SAF-2/M12-M 6

Series	# of Lamps	Lamp Type/Wattage	Color	Voltage	Option
SAF = Remote	-1 = 1 Lamp (AC Only) -2 = 2 Lamps (Standard)	/L5 = LED - 5 watt (12V Only) /M6 = MR16 - 6 watt (6V Only) /M10 = MR16 - 10 watt (6V Only) /M12 = MR16 - 12 watt (12V or 24V only) /M20 = MR16 - 20 watt (12V or 24V Only) /AC = 1 med. Base Socket only (max.60W), no Lamp Included, for Non-Emergency	-M = White -B = Black -DG = Dark Gray -DB = Dark Bronze	6 = 6V 12 = 12V 24 = 24V	VR = Vandal-Resistant Screws



Decorative Remote Series

Lamps: MR16 halogen, 6V, 12V, 24V

To Order: -20W (-20 watts), -35W (-35 watts), -50W (-50 watts),
-6W (-6 watts, 6V only), -10W (-10 watts, 6V only)



AC Systems

Color: WH = white, BK = black

DR1161

Description: Single compact adjustable decorative lighting heads

Dimensions: 4.48" diameter base, 5.2" height



DR2161

Description: Double compact adjustable decorative lighting heads

Dimensions: 4.48" diameter base, 4.0" height



DR3161

Description: Triple compact adjustable decorative lighting heads

Dimensions: 11.0" diameter base, 5.2" height



Surface Type

Color: WH = white, BK = black

DR1160

Description: Single compact adjustable decorative lighting heads

Dimensions: 4.48" diameter base, 5.2" height



DR2160

Description: Double compact adjustable decorative lighting heads

Dimensions: 4.48" diameter base, 4.0" height



DR3160

Description: Triple compact adjustable decorative lighting heads

Dimensions: 11.0" diameter base, 5.2" height



Surface Type

Color: WH = white, BK = black

DR1130

Description: Single compact adjustable decorative lighting heads

Dimensions: 4.48" diameter base, 5.9" height



DR2130

Description: Double compact adjustable decorative lighting heads

Dimensions: 4.48" diameter base, 4.5" height



DR3130


Description: Triple compact adjustable decorative lighting heads

Dimensions: 11.0" diameter base, 5.9" height

ORDERING FORMAT

Series	Color	Wattage	Voltage
DR1130	WH = White BK = Black	/M6 = 6W /M10 = 10W /M12 = 12W /M20 = 20W /M35 = 35W /M50 = 50W	6 = 6V 12 = 12V 24 = 24V

Decorative Remote Series

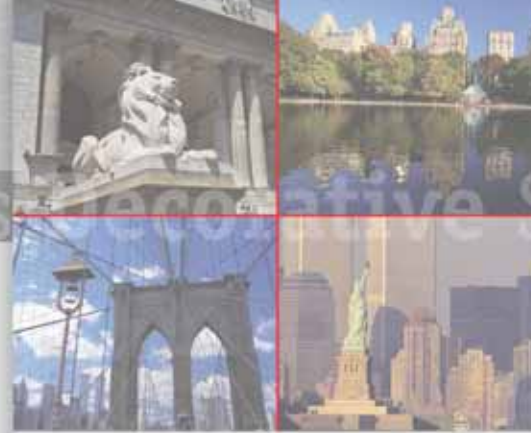

Recessed Type*

RSTH24

Description: Decorative lighting head

Dimensions: 4.0" diameter base

Color Suffix: WH = white, BK = black , CH = chrome,
PB = polished brass, BN = brushed nickel



Recessed Type*

RSTH18

Description: Decorative lighting head

Dimensions: 4.0" diameter base

Color Suffix: WH = white or BN = brushed nickel



Recessed Type*

RSTH18R

Description: Decorative lighting head

Dimensions: 4.0" diameter base

Color Suffix: WH = white or BN = brushed nickel



Recessed Type*

RSTH19

Description: Decorative lighting head

Dimensions: 4.0" diameter base

Color Suffix: WH = white



Recessed Type Housing

LU-GRHR03

Description: New construction housing

Dimensions: 5.6" x 14.24"



Recessed Type Housing

LU-GRHR06

Description: Insulated ceilings housing

Dimensions: 7.25" x 14.24"

*Recessed gimbal assemblies require a recessed housing and are sold separately.

ORDERING FORMAT

Series	Color	Wattage	Voltage
RSTH18	WH = White BK = Black CH = Chrome	PB = Polished Brass BN = Brushed Nickel	/M6 = 6W /M20 = 20W /M10 = 10W /M35 = 35W /M12 = 12W /M50 = 50W
			6 = 6V 12 = 12V 24 = 24V

Remote Fixture Series



ELF2, ELF2D, ELF2T

DESCRIPTION: Single, double or triple PAR18 size indoor lighting head with fully adjustable swivel; all thermoplastic construction.

FINISH: Mist white, black.

LAMPS: Wedge base incandescent or bi-pin halogen.

VOLTS: 6, 12 or 24Vdc

MAXIMUM WATTS: 18



ELF3, ELF3D, ELF3T

DESCRIPTION: Single or double MR16 size indoor lighting heads with fully adjustable swivel. All thermoplastic construction.

FINISH: Mist white, black.

LAMPS: MR16.

VOLTS: 6 or 12Vdc

MAXIMUM WATTS: 20



ELF622, ELF622D, ELF622T

DESCRIPTION: Single, double or triple PAR36 size indoor lighting heads, with fully adjustable swivel to 358°. All aluminum construction.

FINISH: Mist White, Black or Chrome.

MOUNTING: Standard with round aluminum plate for mounting directly to 4" outlet box (4-gang plate for ELF622D optional).

LAMPS: Double contact bayonet base or wedge base incandescent, bi-pin halogen, sealed beam.

VOLTS: 6, 12, 24, 32/36 or 120Vdc

MAXIMUM WATTS: 25 (10 watts for 120V)



ELF645, ELF645D, ELF645T

DESCRIPTION: Single, double or triple PAR36 size lighting head with fully adjustable swivel, all thermoplastic construction.

FINISH: Mist White, Gray or Black.

MOUNTING: Standard with round plate for mounting directly to 4" outlet box (4-gang plate for ELF645D optional).

LAMPS: Double contact bayonet base or wedge base incandescent, bi-pin halogen, sealed beam.

VOLTS: 6, 12, 24, 32/36 or 120Vdc

MAXIMUM WATTS: 25 watts per head



ELF647, ELF647D, ELF647T

DESCRIPTION: NEMA CLASSIFIED. Single, double or triple PAR36 size lighting head with fully adjustable swivel, all thermoplastic construction, and stainless steel screws. Standard with round aluminum plate for mounting directly to 4" outlet box. Fixtures are rain and dust-tight as well as corrosion resistant.

FINISH: Mist White, Gray or Black.


MOUNTING: Standard with round plate for mounting directly to 4" outlet box.

LAMPS: PAR36 sealed incandescent.

VOLTS: 6 or 12Vdc

MAXIMUM WATTS: 25 watts per head

Remote Fixture Series

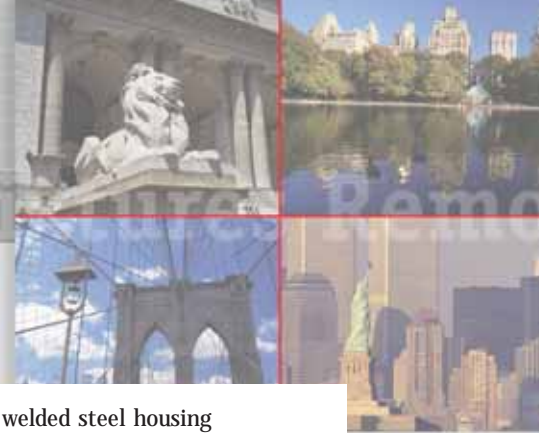

ELF605M, ELF605P

DESCRIPTION: Recessed round gimbal fixture with welded steel housing and plastic (ELF605P) or metal (ELF605M) trim. Lamp has a horizontal rotation of 358° and vertical angle adjustable to 42°.

FINISH: White (standard).

MOUNTING: Recessed (wall or ceiling). Plaster frame and standard 4" outlet box provided.

LAMPS: Double contact bayonet base or wedge base incandescent or bi-pin halogen, sealed beamed.

VOLTS: 6, 12, 24, 32/36 or 120Vdc

MAXIMUM WATTS: 25 watts (6 watts for 120V)



ELF606

DESCRIPTION: Round, surface mounted gimbal fixture with welded steel housing. Lamp has a horizontal rotation of 358° and vertical angle adjustable to 42°.

FINISH: Housing: Matte white.

Trim: White.

MOUNTING: Surface (wall or ceiling). 1/2" or 3/4" knockout provided.

LAMPS: Sealed beam incandescent, double contact bayonet base, wedge-base incandescent, bi-pin halogen.

VOLTS: 6 or 12Vdc

MAXIMUM WATTS: 25 watts per head



ELF610

DESCRIPTION: Recessed adjustable eyeball fixture, can be rotated through 358° and adjustable to 42°.

FINISH: White enamel.

MOUNTING: Recessed (wall or ceiling).

LAMPS: Single contact bayonet base.

VOLTS: 6, 12, 24Vdc

MAXIMUM WATTS: 26 watts per head



ELF644, ELF644-FR

DESCRIPTION: Remote SQUARE-LITE to match RSQ Series shown on page 7. Constructed from high impact, mar-resistant thermoplastic with plated steel reflector and prismatic acrylic lens.

FINISH: Back box: Black satin Front case: Mist white

MOUNTING: Available for surface, semi-recessed (order SQR kit), or fully recessed (order FSQR kit) mounting. Fully recesses into T-bar or exposed Z-spline ceilings. Supporting bars or rods supplied by others.

LAMPS: Bi-pin halogen lamp.

VOLTS: 6 or 12Vdc

MAXIMUM WATTS: 14 watts per lamp

Lamp type(s), voltage and maximum wattage available for fixtures are shown under lamp description. Determine lamp type, voltage and wattage required for your application, then select lamp from lamp chart on pages 42 and 43.

ORDERING FORMAT

Series ELF647	Lamps Suffix /4044	Color M = Mist White	Voltage 12 = 12V